


Feature :
Push / pull switch
SPDT, DPDT, momentary function

Application :
Equipments
Game machines
Office appliances
Electrical home appliances




SWITCH SPECIFICATIONS		
POLE - POSITION	Momentary type , SPDT , DPDT	
CONTACT RATING	250 V AC , 10(6) A	
CONTACT RESISTANCE	100 mΩ MAX. 1.5 V DC ; 100 mA , by method of voltage DROP	
INSULATION RESISTANCE	500 MΩ MIN. 500 V DC	
DIELECTRIC STRENGTH	Breakdown is not allowable ; 1000 V AC for 1 minute	
OPERATING FORCE	FUNCTION A&B (SPDT) : PUSH : 400±100 ; PULL : 450±200	FUNCTION A1&B1 (SPDT) : PUSH : 600±200
	FUNCTION A (DPDT) : PUSH : 500±200 ; PULL : 700±300	FUNCTION A1 (DPDT) : PUSH : 600±200
OPERATING LIFE	50,000 cycles	
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C	
TOTAL TRAVEL	5.5 ± 0.3 mm	

● HOW TO ORDER

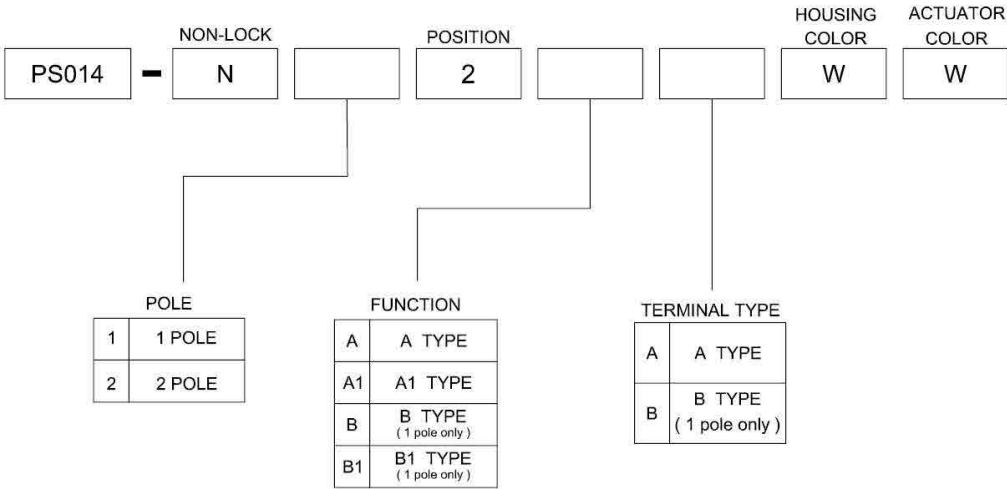


DIMENSION


• PS014-N12AAWW

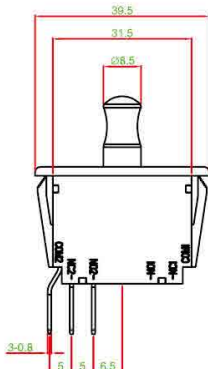

• PS014-N22A1AWW

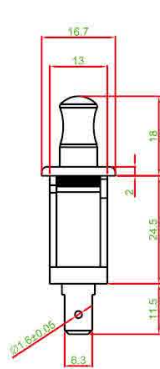


• PS014-N12BBWW

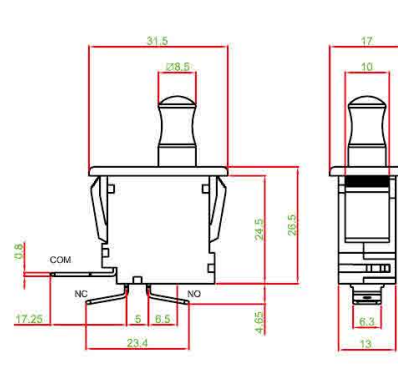


FUNCTION


• A TYPE




• B TYPE



• A1 TYPE

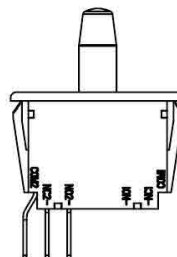


• B1 TYPE




CIRCUIT


• 1P2T A TYPE




• 1P2T A1 TYPE




• 1P2T B TYPE




• 1P2T B1 TYPE



• 2P2T A TYPE

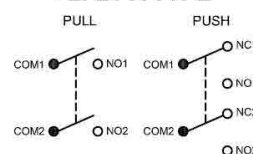

• 2P2T A1 TYPE



PANEL CUT OUT



PS014-N□2AA□□	
PANEL THICK	W
0.75 ~ 1.25	36
1.25 ~ 2.0	36.5
2.0 ~ 3.0	37

PS014-N12BB□□	
PANEL THICK	W
0.75 ~ 1.25	28
1.25 ~ 2.0	28.5
2.0 ~ 3.0	29