

Feature :

Noiseless
Long electrical life cycles
Long contact travel
SPST, momentary function

Application :

Audio / video products.
Instrumentation
Communication equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	OFF - ON for Momentary Type , SPST
RATING	POWER : 1 Watt MAX. CURRENT : 50uA MIN. / 100mA max. VOLTAGE : DC 20V MAX.
CONTACT RESISTANCE	150 mΩ MAX.
BREAKDOWN VOLTAGE	230 V DC
INSULATION RESISTANCE	10 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	250 ± 50 gf
OPERATING LIFE	50,000,000 cycles
TEMPERATURE RANGE	OPERATING : -5°C ~ 60°C STORAGE : -40°C ~ 90°C
TOTAL TRAVEL	3.3 ± 0.3 mm

LED SPECIFICATIONS		Value / LED Color						
ATTENTION LEDs are Electrostatic Sensitive devices 	Unit							
		Blue	Pure Green	Red	Yellow	Orange	White	Green
LUMINOUS INTENSITY@20mA I _v	mcd	40	200	280	80	280	150	3
Dominant Wavelength λ _D	nm	470	525	630	590	630	/	568
FORWARD VOLTAGE@20mA V _f	V	3.3	3.3	1.95	2	1.95	150	3





■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

HOW TO ORDER

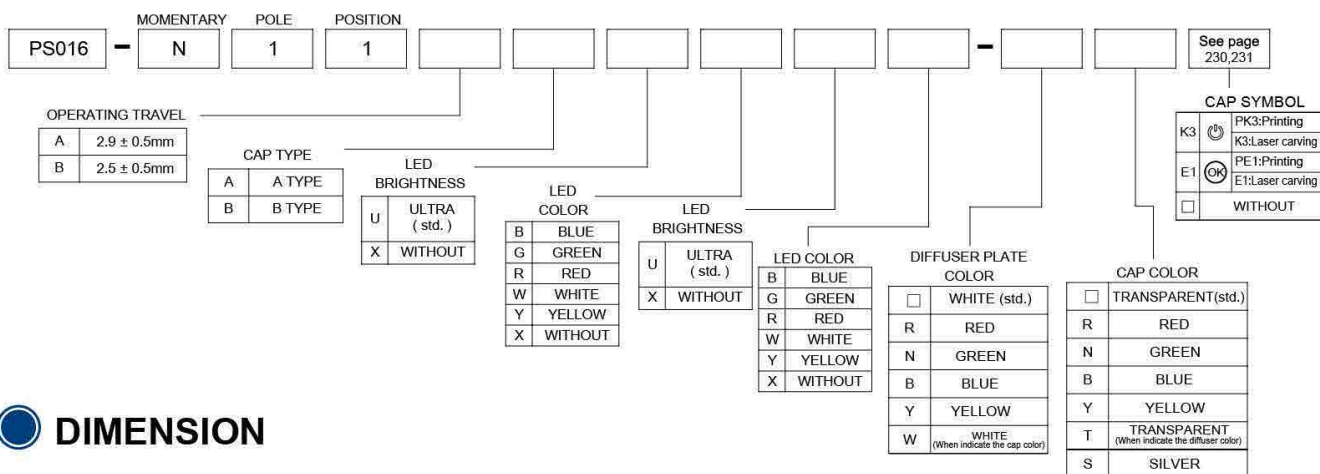


DIMENSION

PS016 - N11AA



CAP TYPE

B TYPE



CIRCUIT

SINGLE COLOR

TWO COLOR

