

Feature :

Rating: 1.7A, 13VDC,
SPDT or DPDT
Lock / non-lock function

Application :

Automotive
Consumer products
Computer products
Communication equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	1P2T or 2P2T , Lock type are Available
CONTACT RATING	13 V DC , 1.7 A or 125 V AC , 3 A
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC ; 100 mA , by method of voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not allowable ; 500 V AC for 1 minute
OPERATING FORCE	400 ± 200 gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	3.5 ± 0.3 mm

LED SPECIFICATIONS								
 ATTENTION LEDs are Electrostatic Sensitive devices 	Unit	Value / LED Color						
		Blue	Pure Green	Red	Yellow	Orange	Green	White
LUMINOUS INTENSITY@20mA I _v	mcd	80	150	220	180	320	50	450
Dominant Wavelength λ _D	nm	465	525	630	590	601	567	/
FORWARD VOLTAGE@20mA V _f	V	3.3	3.2	1.95	2	2.1	2.1	3.3


■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

HOW TO ORDER

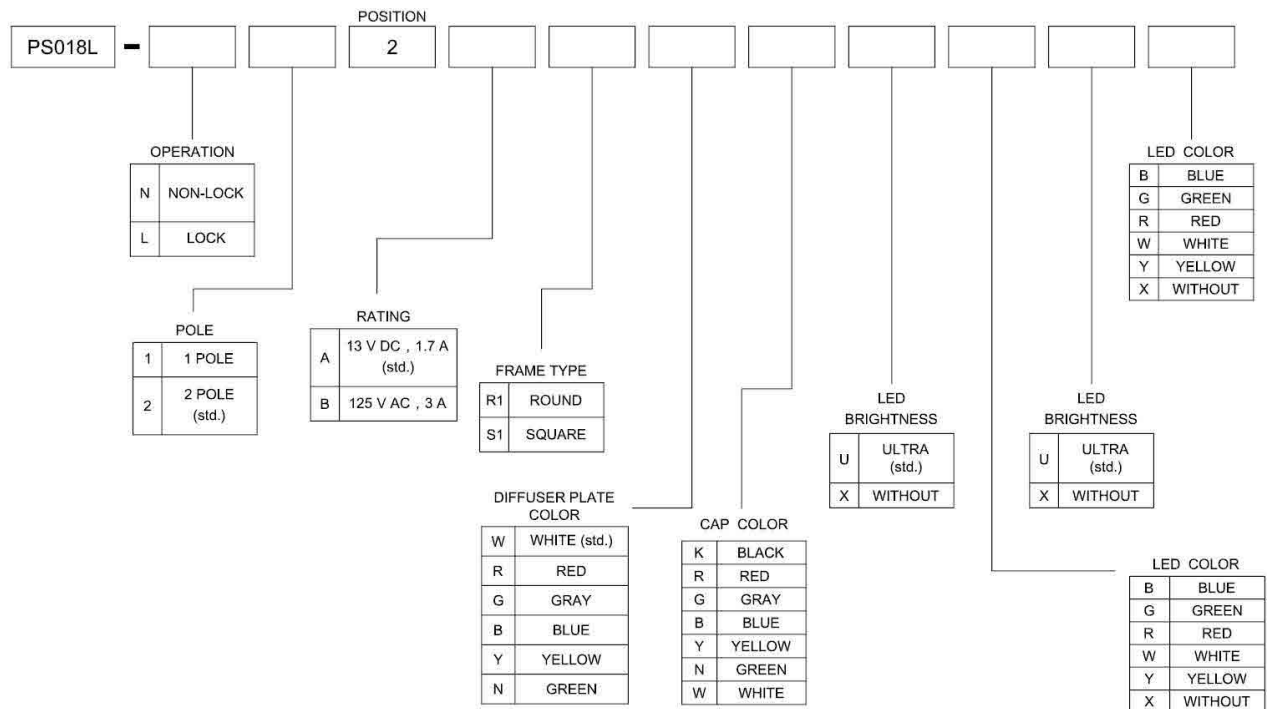


CAP TYPE

• PS018L-L22AR1WK □□□□

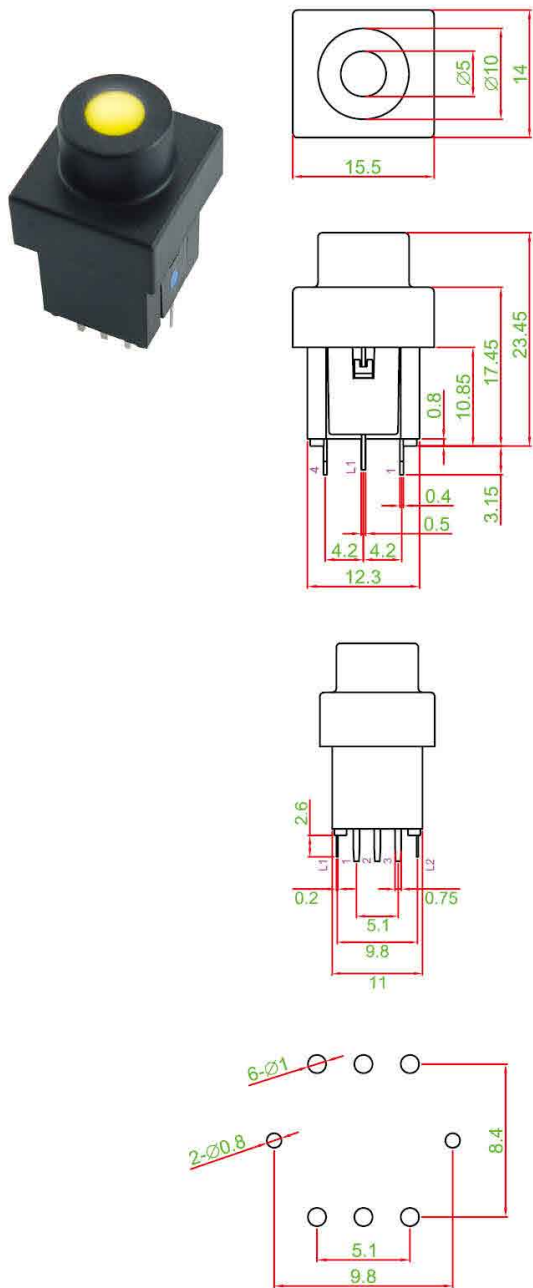


• PS018L-L22AS1WK □□□□

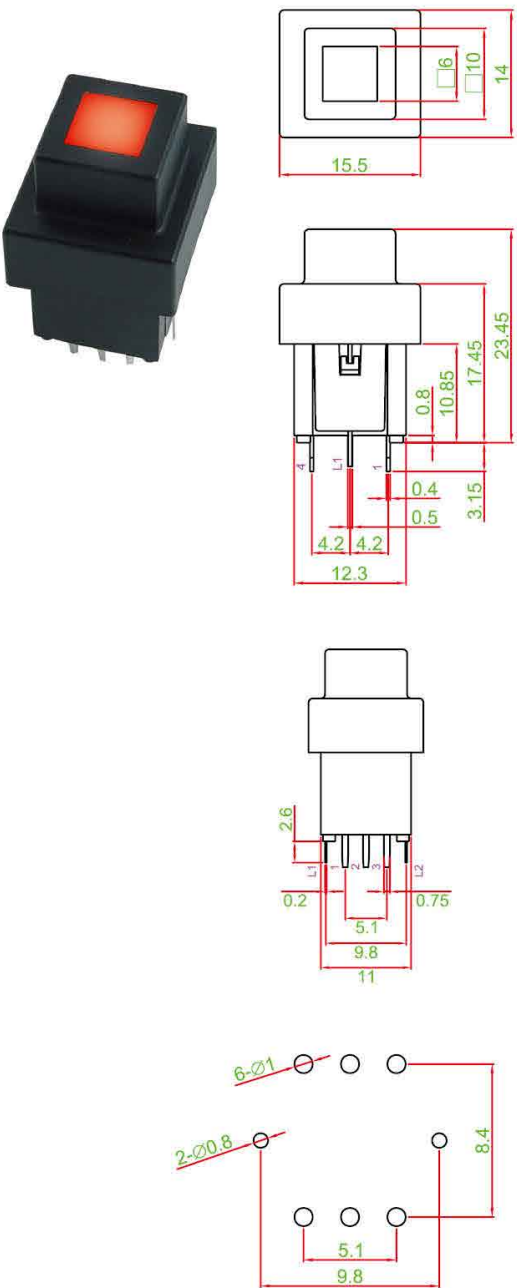

CIRCUIT

SINGLE
COLOR



TWO
COLOR

