

Feature :

- Small size push switch (6x6 mm)
- Lock / non-lock function
- Lock / non-lock function


Application :

- Consumer products
- Computer products
- Instrumentation
- Communication equipments






SWITCH SPECIFICATIONS	
POLE - POSITION	SPDT , DPDT
CONTACT RATING	12 V DC , 50 mA
CONTACT RESISTANCE	100 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	250 ± 50 gf
OPERATING LIFE	50,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL / OPERATING TRAVEL	2 ± 0.3 mm / 1 ± 0.3 mm

● HOW TO ORDER



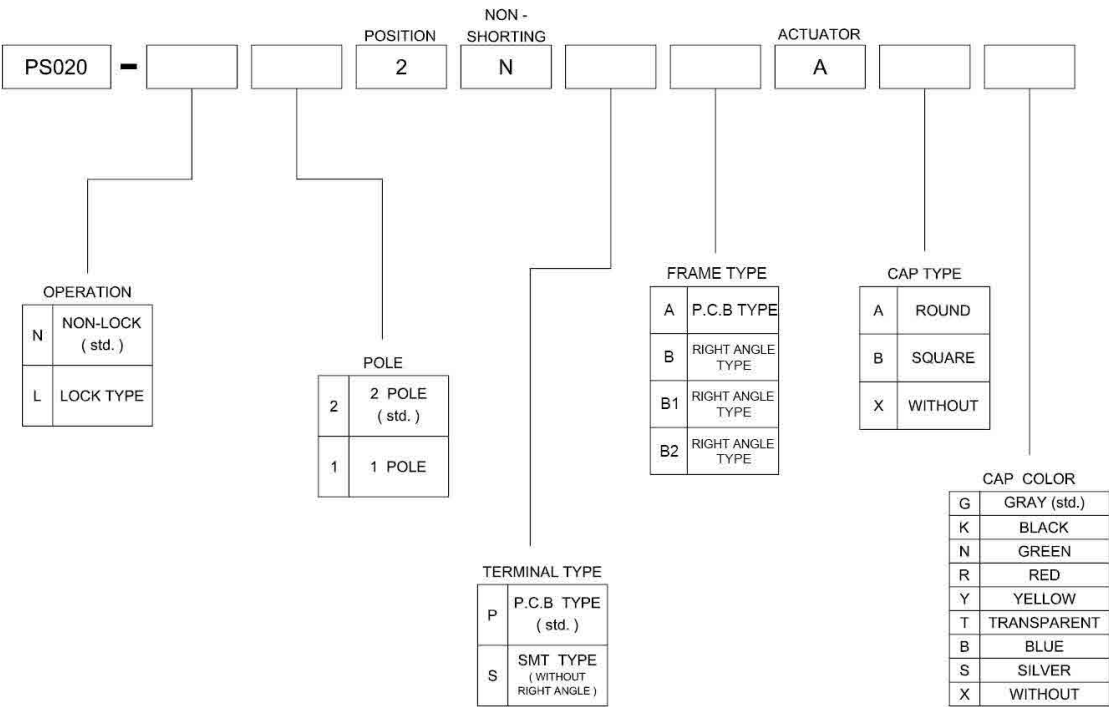


● TERMINAL & FRAME TYPE




• PS020-L22NPAAX






• PS020-L12NSAAX






• PS020-L12NPBAX



• PS020-L12NPB1AX




• PS020-L12NPB2AX(ODM)




● CAP TYPE

• A TYPE(ROUND)




• B TYPE(SQUARE)



● CIRCUIT

SINGLE POLE



DOUBLE POLE

