


Feature :
DPDT
On-On function

Application :
Consumer products
Computer products
Instrumentation
Communication equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	1P2T , Momentary
CONTACT RATING	36 V DC , 0.2 A
CONTACT RESISTANCE	40 mΩ MAX. 1.5 V DC ; 100 mA , by method of voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not allowable ; 500 V AC for 1 minute
OPERATING FORCE	300 ± 100 gf
OPERATING LIFE	500,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	5.8 ± 0.3 mm

● HOW TO ORDER

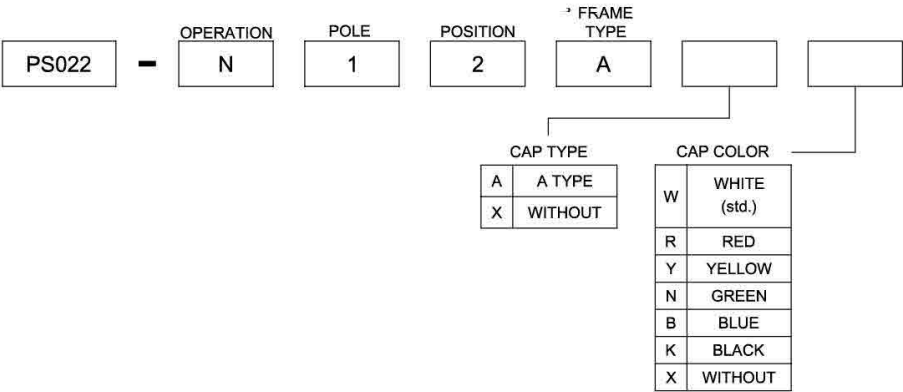


● DIMENSION

· PS022-N12AXX

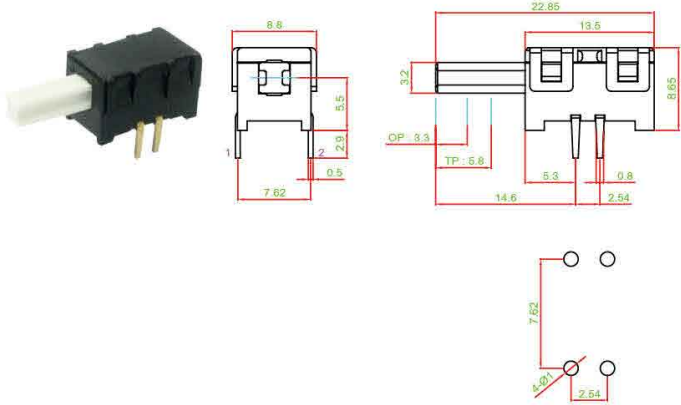

● CAP TYPE

· PS022-N12AAK

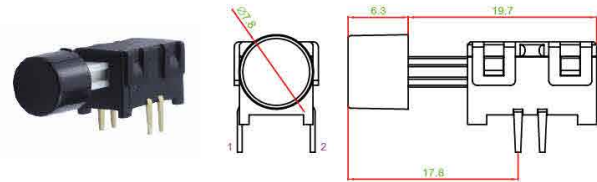

● CIRCUIT

