

Feature :
Multiple shapes available
Panel mount design
Illuminated LED and RGB color available
High rating

Application :
Gaming machine
Car park ticket machine
Vendor Machine
Amusement park machine




SWITCH SPECIFICATIONS	
POLE - POSITION	SPDT
CONTACT RATING	3A 125/250VAC ; 30 V DC , 3A
CONTACT RESISTANCE	300 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	200 gf MAX.
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL / OPERATING TRAVEL	1.8 ± 0.3 mm / 1.3 ± 0.3 mm

LED SPECIFICATIONS								
ATTENTION LEDs are Electrostatic Sensitive devices  (+) ○  ○ (-)	Unit	Value / LED Color						
		Blue	Pure Green	Red	Yellow	Orange	White	Green
LUMINOUS INTENSITY@20mA Iv	mcd	150	1000	800	350	700	300-1500	330
Dominant Wavelength λD	nm	470	525	630	590	601	/	570
FORWARD VOLTAGE@20mA Vf	V	3.7	3.5	2	2.1	2.1	3.5	2.1


A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

● HOW TO ORDER

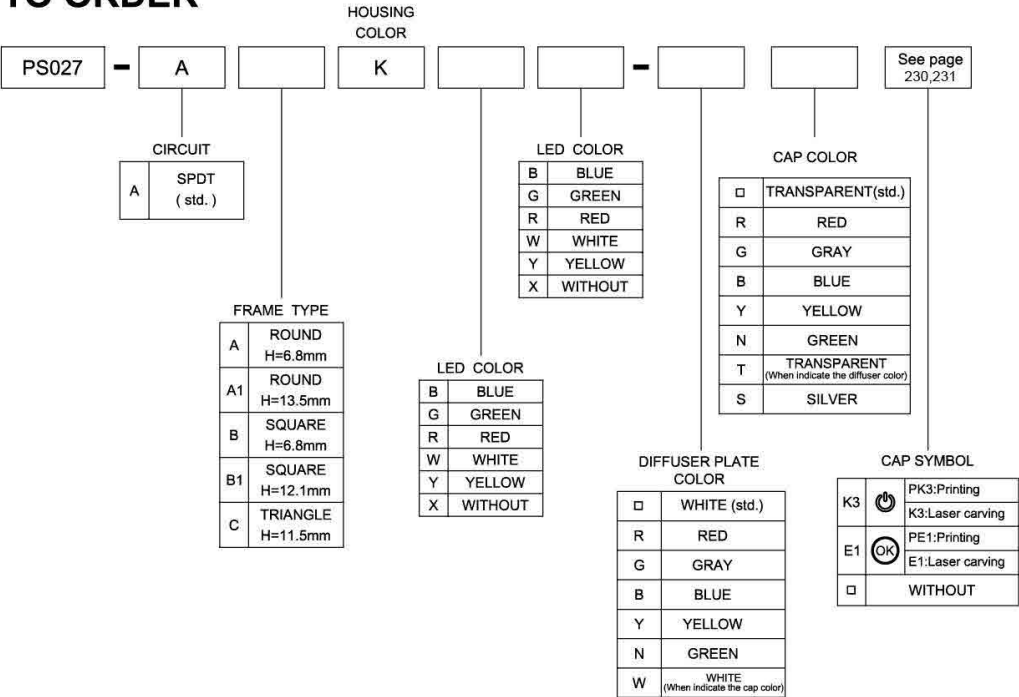


DIMENSION


• PS027-AAK □□

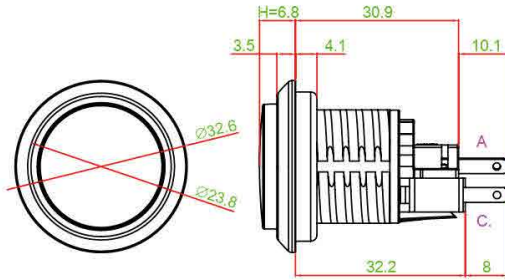


PANEL CUT OUT
THICKNESS=4.5MIN.




• PS027-AA1K □□

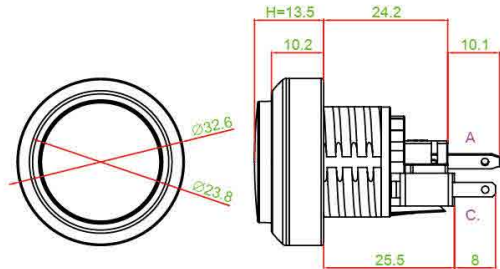


PANEL CUT OUT




• PS027-ABK □□

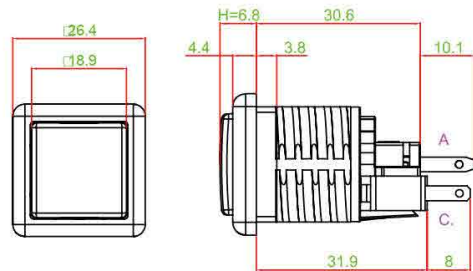


PANEL CUT OUT
THICKNESS=4.2MIN.




• PS027-AB1K □□

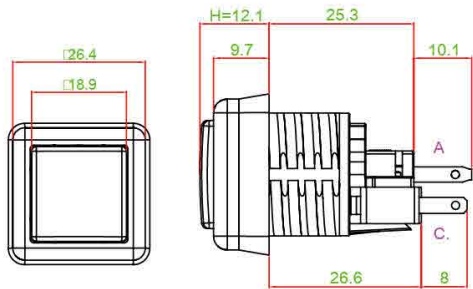


PANEL CUT OUT




• PS027-ACK □□

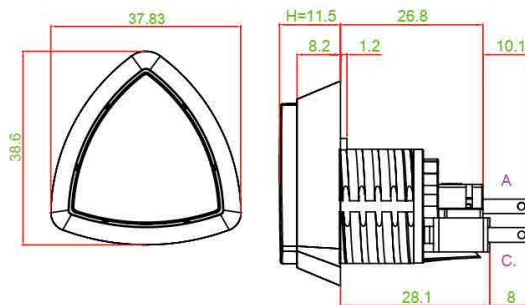

PANEL CUT OUT
THICKNESS=1.5MIN.



CIRCUIT



NUT

