

Feature :

With screw mount installation
Wire and PCB terminal


Application :

Consumer products
Computer products
Instrumentation
Communication equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	SPST ,Momentary and Lock Type are Available
CONTACT RATING	120 V AC or 28 V DC , 1 A
CONTACT RESISTANCE	30 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	650 ± 150 gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	3.3 ± 0.3 mm

● HOW TO ORDER

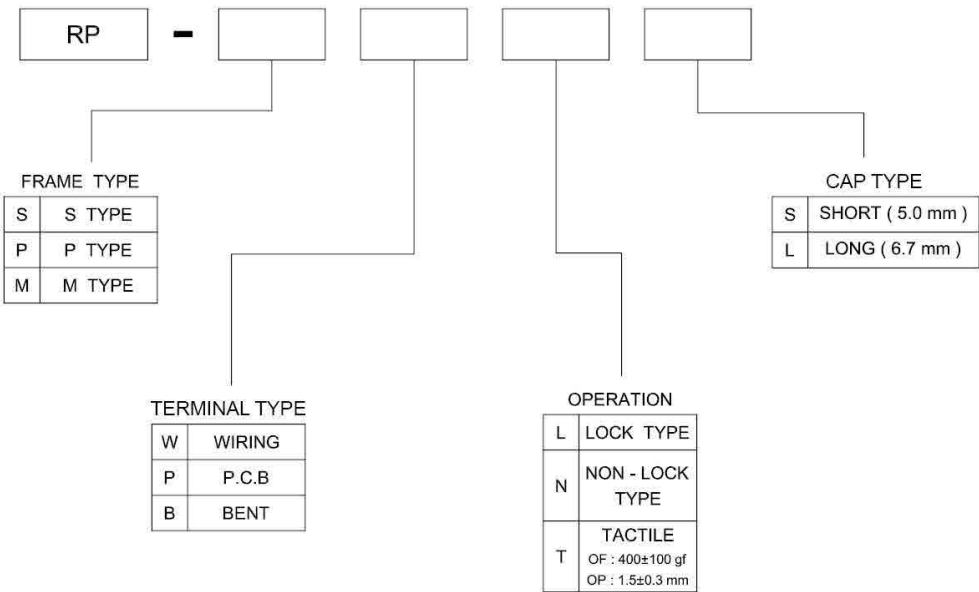


DIMENSION


· RP - MWNS

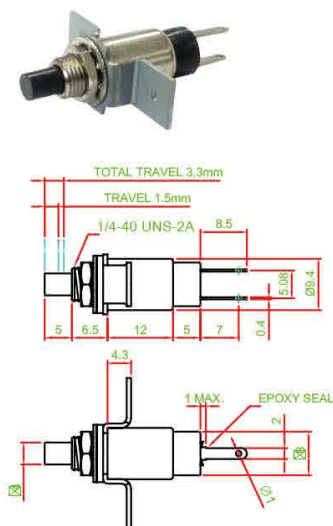

· RP - PBNS

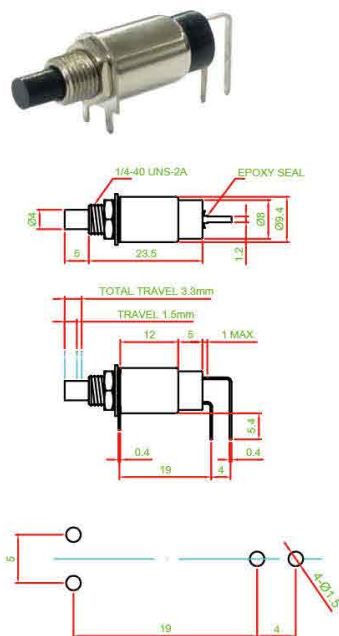

· RP - SPLL

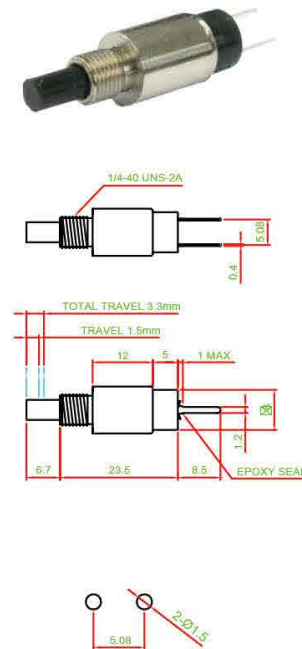

FRAME TYPE


S TYPE



P TYPE




M TYPE




TERMINAL TYPE


W TYPE



P TYPE



B TYPE



CIRCUIT

