


Feature :
Multiple keys and poles
Interlock and individual lock

Application :
Various switching purpose
Home electronic equipments
Industrial equipments






SWITCH SPECIFICATIONS	
POLE - POSITION	2P2T, 4P2T, 6P2T, 8P2T, 10P2T, 16P2T, Momentary and Lock Type Available
CONTACT RATING	25 V DC , 1 A ; 125 V AC , 0.2 A
CONTACT RESISTANCE	40 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	2P2T , 4P2T , 6P2T : 350 ± 150gf ; 8P2T , 10P2T , 16P2T : 600 ± 150gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
OPERATING TRAVEL	2.0 ± 0.3 mm

● HOW TO ORDER



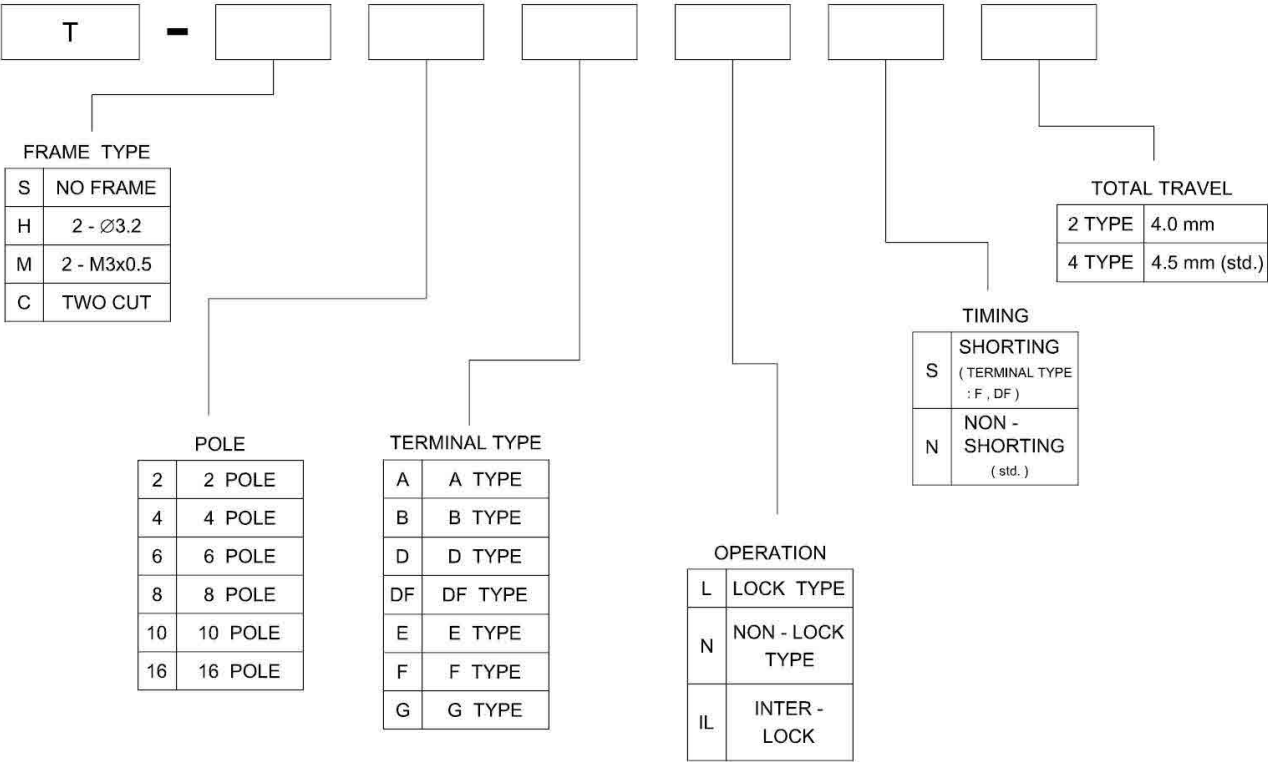


DIMENSION




• T-S2ANN4

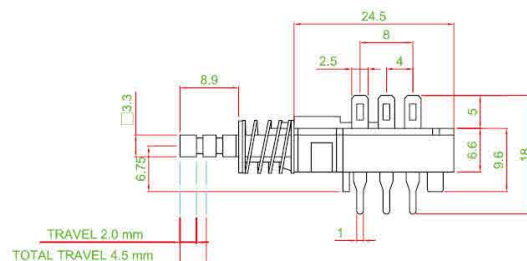




• T-H2ALN4

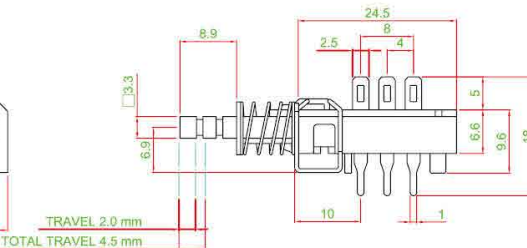

• T-M2AANN4

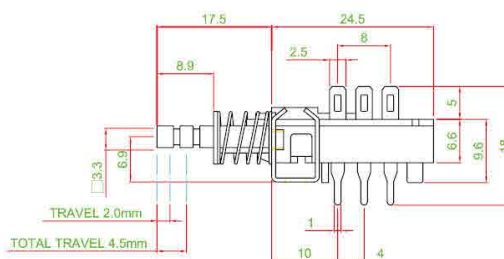


• T-S4G/2ALN4

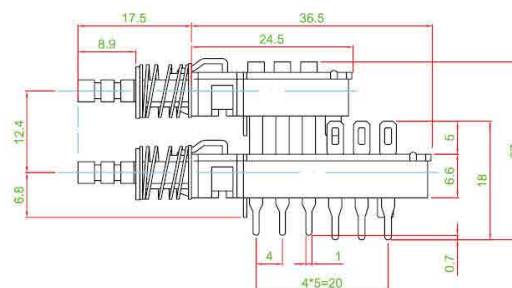


FRAME TYPE


• S TYPE




• H TYPE




• M TYPE




• C TYPE





TERMINAL TYPE

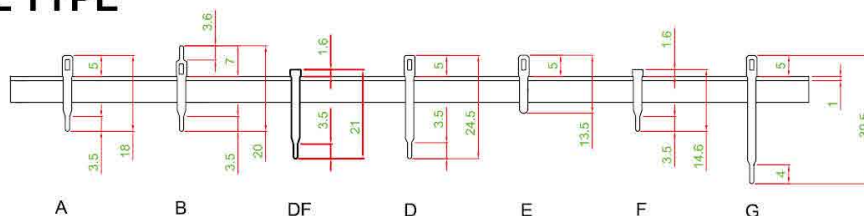



POLE	2	4	6	8	10	16
L(mm)	24.5	36.5	48.5	60.5	72.5	108.5

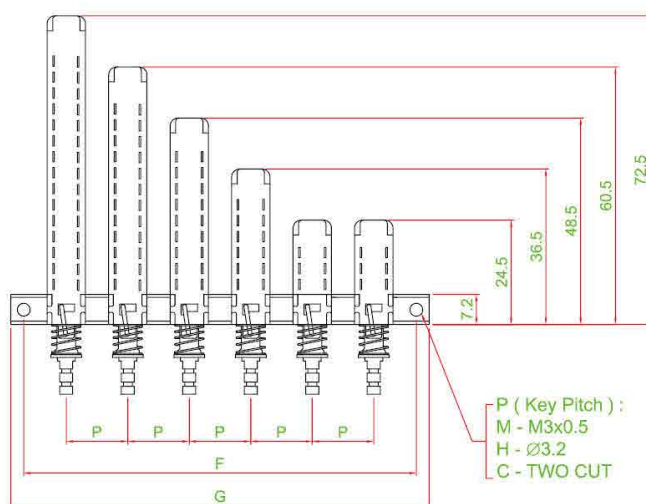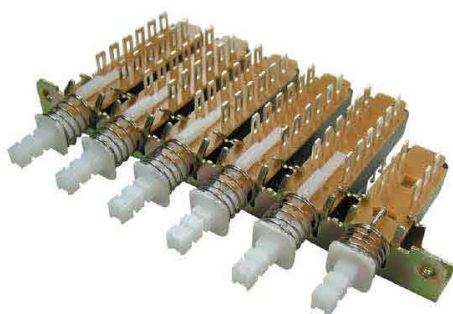

SIZE PITCH		G	F		G	F		G	F		G	F		G	F
10	1 F	26	20	3 F	46	40	5 F	66	60	7 F	86	80	9 F	106	100
12.5		24	18		51	45		76	70		101	95		126	120
15					56	50		86	80		116	110		146	140
17.5					61	55		96	90		131	125		166	160
20					66	60		106	100		146	140		186	180
10	2 F	36	30	4 F	56	50	6 F	76	70	8 F	96	90	10 F	116	110
12.5		38.5	32.5		63.5	57.5		88.5	82.5		113.5	107.5		138.5	132.5
15		41	35		71	65		101	95		131	125		161	155
17.5		43.5	37.5		78.5	72.5		113.5	107.5		148.5	142.5		183.5	177.5
20		46	40		86	80		126	120		166	160		206	200

FRAME TYPE M ☐ M3x0.5 H ☐ Ø3.2 C ☐ TWO CUT

KEY	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
OPTION / 選項																
POLE / 回路數																
TERMINAL TYPE / 端子																
OPERATING / 動作																
TIMING N / S																
TRAVEL / 行程																
KNOB																
PITCH / 間距	☐ 10mm ☐ 12.5mm ☐ 15mm ☐ 17.5mm ☐ 20mm ☐ 25mm ☐ 30mm															