




DIMENSION	TOLERANCE
BELOW 10 mm	± 0.3
10~100 mm	± 0.5
ABOVE 100 mm	± 0.8
ANGLE	± 3°

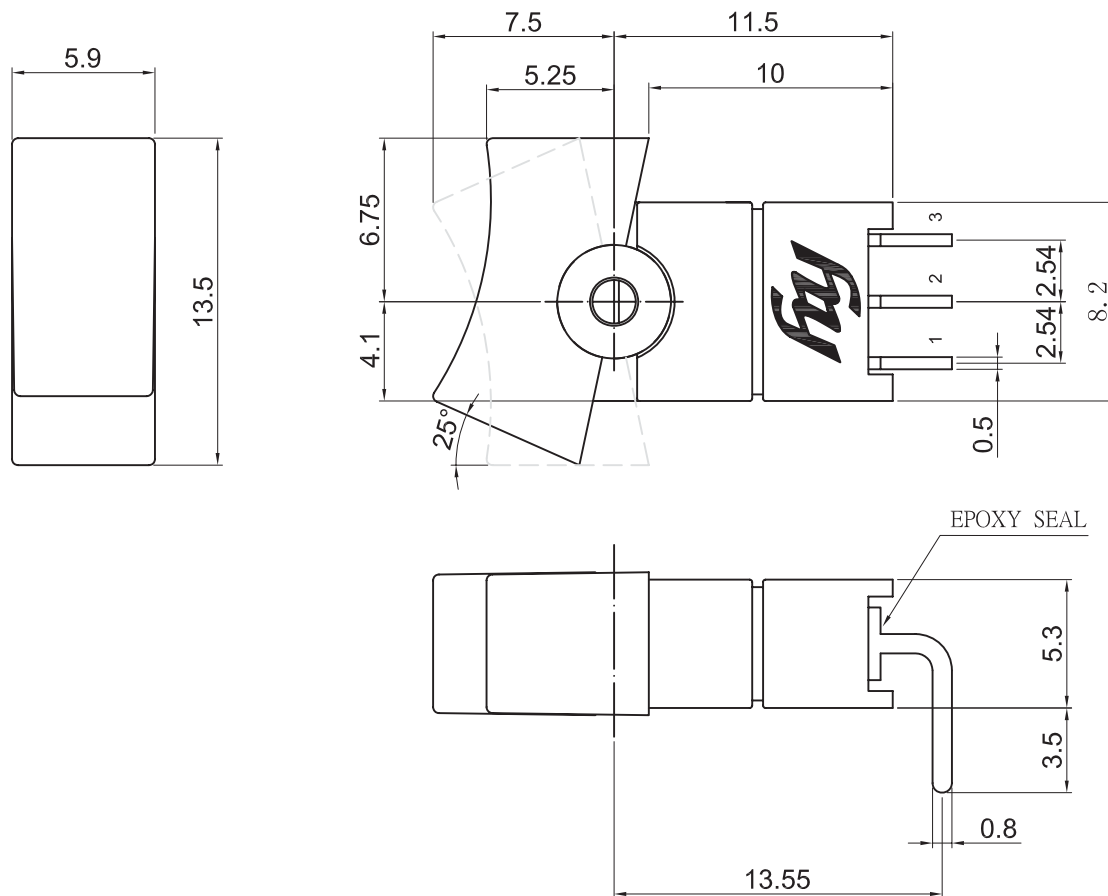

PANEL MOUNTING

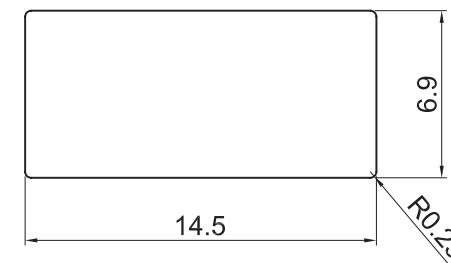

P.C.B MOUNTING



SCHEMATIC	
Model	Position



SPECIFICATIONS:

- 1.RATING : 1Amps with resistive load @ 19 VDC .
- 2.MECHANICAL LIFE : 10,000 make-and-break cycles.
- 3.CONTACT RESISTANCE : 20mΩ max. DC 1.5V 100mA .
- 4.INSULATION RESISTANCE : 1,000MΩ min.
- 5.DIELECTRIC STRENGTH : 1000V AC for 1 Minute .
- 6.OPERATING TEMPERATURE : -30°C ~ 85°C .

DATE	APPROVAL	DESIGN	ENGINEERING CHANGE DESCRIPTION	DESIGN	DATE	UNIT	MODE	ROCKER SWITCH	
				DATE	2011/01/03	mm	MODE	ROCKER SWITCH	
				APPROVAL	KAVEN	SCALE	1 : 1	PART	HY001-RC-0-R3-2
				CONFIRM	ALAN	VIEW		2D FILE NAME	HY001-RC-0-R3-2
				DESIGN	PXZ	VER.	01	3D FILE NAME	

淮洋有限公司
HUI YANG CO.,LTD.
www.hy1688.com.tw

DIMENSION	TOLERANCE
BELOW 10 mm	± 0.3
10~100 mm	± 0.5
ABOVE 100 mm	± 0.8
ANGLE	± 3°

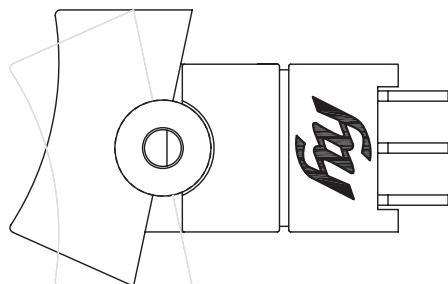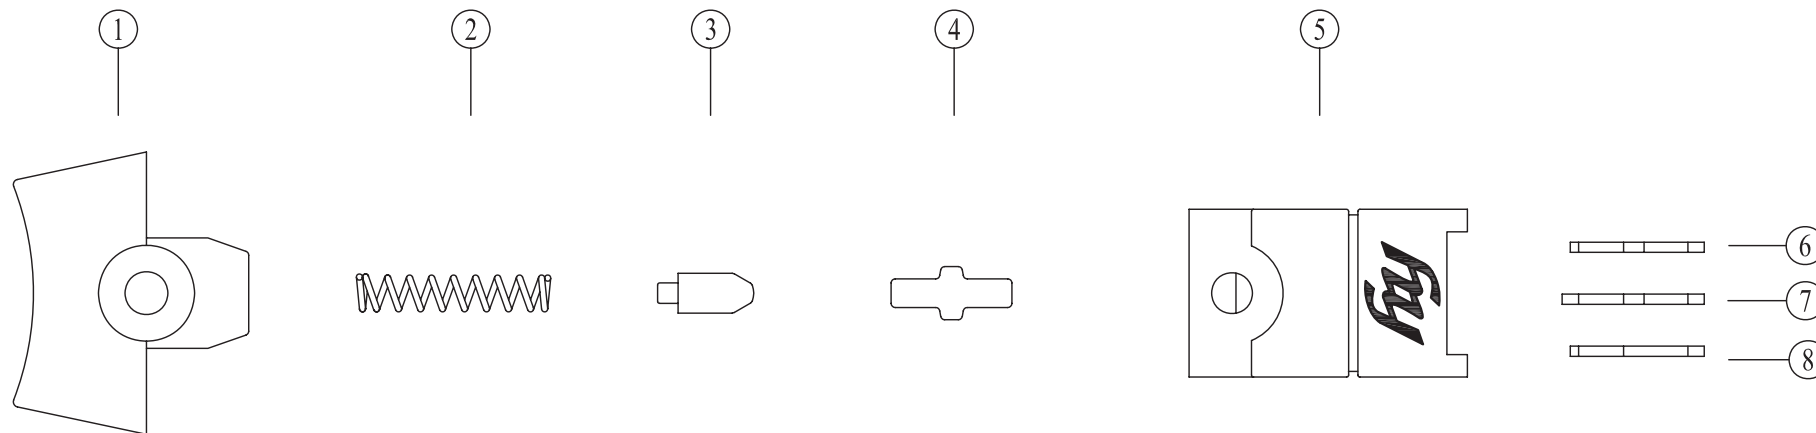

NO.	PART NAME	QTY	MATERIAL	SPECIAL DEAL	RoHS REPORT No.
1	KNOB	1	PA66 (70G33L)	BLACK	CE/2009/71300A
2	SPRING	1	STAINLESS STEEL(SUS304)		CE/2009/B6572
3	ACTUATOR	1	PA66 (70G33L)	WHITE	CE/2009/71301A
4	MOVING CONTACT	1	PHOSPHOR BRONZE (C5191)	SILVER PLATING 0.5μm	CE/2010/13746A ; CE/2009/C5706
5	BASE FRAME	1	PA66 (70G33L)	BLACK	CE/2009/71300A
6	TERMINAL	1	BRASS (C2680)	SILVER PLATING 0.5μm	CE/2010/13747A ; CE/2009/C5706
7	TERMINAL	1	BRASS (C2680)	SILVER PLATING 0.5μm	CE/2010/13747A ; CE/2009/C5706
8	TERMINAL	1	BRASS (C2680)	SILVER PLATING 0.5μm	CE/2010/13747A ; CE/2009/C5706

DATE	APPROVAL	DESIGN	ENGINEERING CHANGE DESCRIPTION	DESIGN	PXZ	VER.	01	3D FILE NAME	
				DATE	2011/01/03	UNIT	mm	MODE	ROCKER SWITCH
				APPROVAL	KAVEN	SCALE	1 : 1	PART	HY001-RC-0-R3-2
				CONFIRM	ALAN	VIEW		2D FILE NAME	HY001-RC-0-R3-2


淮洋有限公司
HUAI YANG CO.,LTD.
www.hy1688.com.tw