


過載保護開關 SS-001



SS-001

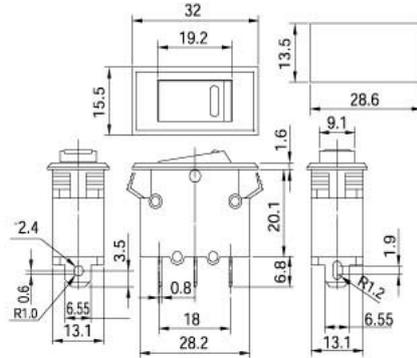

MAX. Internal	
3A-4A	0.100
5A-6A	0.025
7A-9A	0.020
10A-12A	0.010
13A-15A	0.010

DERATING FACTOR	
TEMP	3A~15A
60°C	x 0.50
55°C	x 0.55
50°C	x 0.65
45°C	x 0.70
40°C	x 0.80
35°C	x 0.85
30°C	x 0.88
25°C	x 1.00
20°C	x 1.10
15°C	x 1.20
10°C	x 1.30

(FOR REFERENCE ONLY)

Specifications:


- *Standard Rating: 10-15 AMPERE.
- *Input Power: 125VAC/250VAC.
- *Contact Resistance: 30M max.
- *Dielectric Strength: 60Hz 1250VAC/1 Minute.
- *Interrupt Capacity: 125VACx1000A.
- *Electrical Life: 6000 Cycles (min).
- *Mechanical Life: 10000 Cycles (min).
- *Insulation Resistance: >100 M
- *Calibration:
- 25 C-100% of Rated Current-Continuously Carried.
- 25 C-Between 101% to 149%-May Trip or Not.
- 25 C-150% of Rated Current-Trip Within 1 HR.
- 25 C-200% of Rated Current-Trip Within 3-50 Sec.
- 25 C-300% of Rated Current-Trip Within 0.8-12 Sec.

Approvals:


*SS-001 8A-15A 125 VAC / 60 Hz

How to Order

Terminal

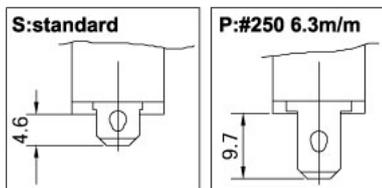

How to Order

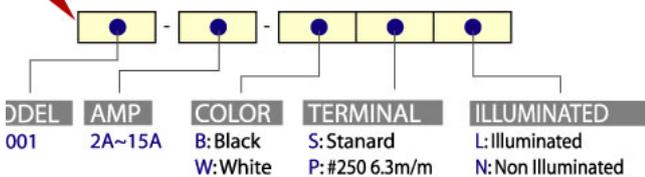

Trip Time Curve @ +25 C

