



淮洋有限公司 HUI YANG CO., LTD.

TEL : 886-2-8261-8986 FAX : 886-2-8261-1885

www.hy1688.com.tw 236新北市土城區中央路二段191號10樓之5



SS11 SERIES


翘板式 电源开关

Double-Pole and Single-Pole Rocker Power Switches

PANEL CUTOUT DIMENSION

(面板安装孔開口尺寸)

PANEL THICKNESS	X	Y
0.75-1.25mm	19.2 ⁺⁰ _{-0.1} mm	12.9 ^{+0.1} ₋₀ mm
1.25-2.0mm	19.4 ⁺⁰ _{-0.1} mm	12.9 ^{+0.1} ₋₀ mm
2.0-3.0mm	19.8 ⁺⁰ _{-0.1} mm	12.9 ^{+0.1} ₋₀ mm



SPECIFICATION 規格:

Rating 額定:

12A 125/250VAC(CUL)

16A 125/250VAC(CUL)

16(4)A 250V~T125/55 (VDE,ENEC10)

Electrical (電氣性能)

(接觸電阻) INITIAL CONTACT RESISTANCE:20mΩ Max

(操作力量) OPERATION FORCE:500±200gf

(絕緣電阻) INSULATION RESISTANCE:100MΩ Min 500VDC

(耐電壓) WITHSTAND VOLTAGE:1KVAC FOR 1 MINUTE

(電氣壽命) ENDURANCE:10,000 CYCLES

SNAP IN PANEL MOUNTING

(卡入面板安裝)

Material (材質)

(端子座) TERMINAL BASE:NYLON 66(UL 94V-0)

(柄) ACTUATOR:NYLON 66(UL 94V-0)


(彈簧) SPRING:STAINLESS STEEL WIRE

(接觸片) CONTACT:COPPER/SILVER PLATED

(端子) TERMINAL: BRASS/SILVER PLATED

(接點) CONTACT:Ag ALLOY

HOW TO ORDER 採購識別碼


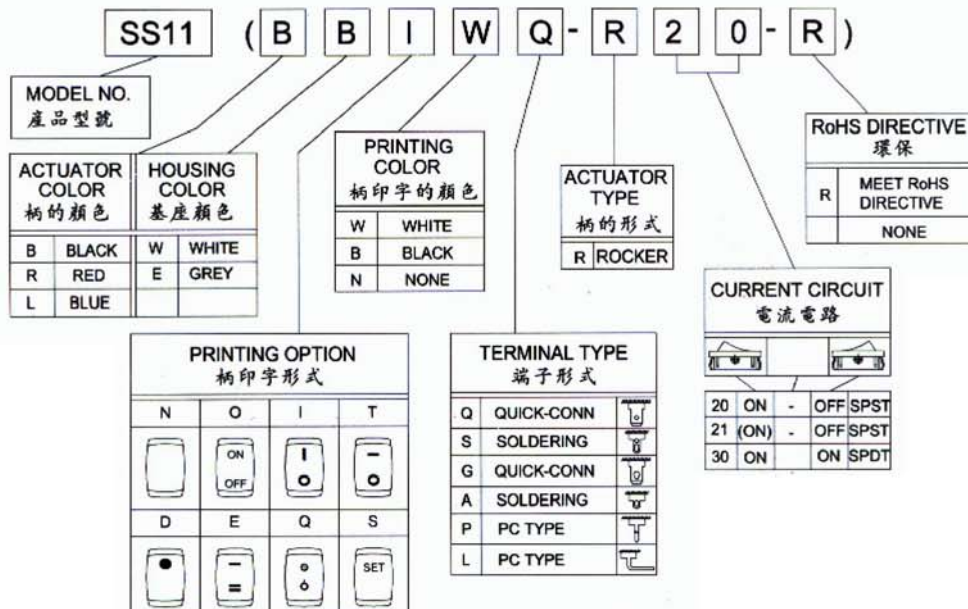


SPEC DRAWING (規格圖面)



Unit:mm





SS11(BBIWQ-R20-R)



SS11(BBIWS-R30-R)



SS11(LLSWQ-R20-R)



SS11(BBIWG-R20-R)

