




淮洋有限公司 HUI YANG CO., LTD.

TEL : 886-2-8261-8986 FAX : 886-2-8261-1885

www.hy1688.com.tw 236新北市土城區中央路二段191號10樓之5

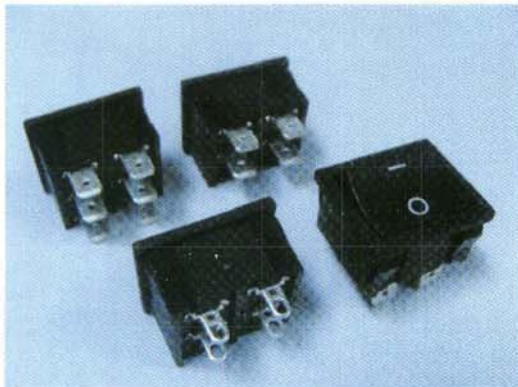

SS24 SERIES


翹板式 電源開關

Double-Pole and Single-Pole Rocker Power Switches

PANEL CUTOUT DIMENSION

(面板安裝孔開口尺寸)

PANEL THICKNESS	X	Y
0.8~1.2mm	19.2 ⁺⁰ _{-0.1} mm	21.9 ^{+0.1} ₋₀ mm
1.3~2.0mm	19.4 ⁺⁰ _{-0.1} mm	21.9 ^{+0.1} ₋₀ mm
2.1~2.5mm	19.8 ⁺⁰ _{-0.1} mm	21.9 ^{+0.1} ₋₀ mm



SPECIFICATION 規格:

Rating 額定:

12A 125/250VAC(CUL)

16A 125/250VAC(CUL)

16(4)A 250V~T125/55 (VDE, SEMKO, NEMKO,
FIMKO, DEMKO)

Electrical (電氣性能)


(接觸電阻) INITIAL CONTACT RESISTANCE: 20mΩ Max

(操作力量) OPERATION FORCE: 500±200gf

(絕緣電阻) INSULATION RESISTANCE: 100MΩ Min 500VDC

(耐電壓) WITHSTAND VOLTAGE: 1KVAC FOR 1 MINUTE

(電氣壽命) ENDURANCE: 10,000 CYCLES



SNAP IN PANEL MOUNTING

(卡入面板安裝)

Material (材質)

(端子座) TERMINAL BASE: NYLON 66(UL 94V-0)

(柄) ACTUATOR: NYLON 66(UL 94V-0)


(彈簧) SPRING: STAINLESS STEEL WIRE

(接觸片) CONTACT: COPPER/SILVER PLATED

(端子) TERMINAL: BRASS/SILVER PLATED



(接點) CONTACT: Ag ALLOY

HOW TO ORDER 採購識別


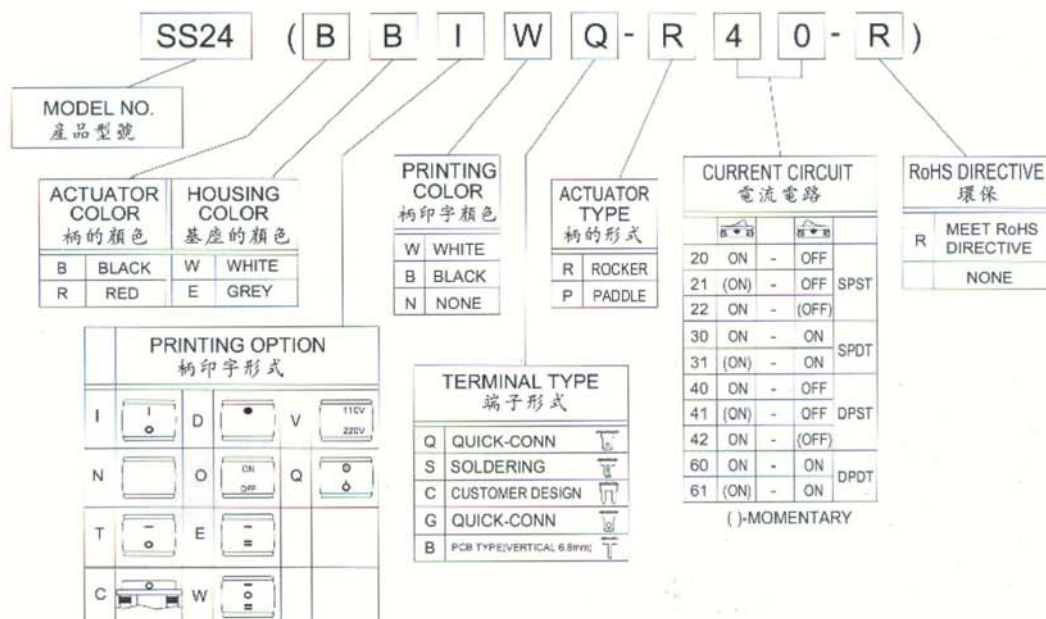






SS24(BBIWO-R40-R)



SS24(BBIWS-R40-R)



SS24(BBTWO-R60-R)



SS24(BBNNO-R60-R)

