


Feature :
Multi-sections and multi-poles

Application :
Equipments, broadcast system
Data switch, monitor switching





SWITCH SPECIFICATIONS	
POLE - POSITION	2P12T , Multi - sections and multi - poles
CONTACT RATING	30 V DC , 500 mA
CONTACT RESISTANCE	25 mΩ MAX. 1 AC KHz±200Hz voltage / current less than 20Mv / 50mA or DC 5V 1A1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	1 ± 0.5 Kgf.cm
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C

● HOW TO ORDER

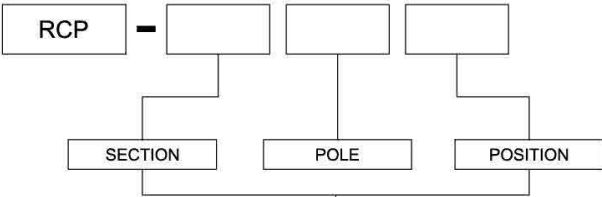


SECTION (1~12)	POLE	POSITION (2~12)	BODY LENGTH (L)	SECTION (1~12)	POLE	POSITION (2~12)	BODY LENGTH (L)
1	6	2	7.3	6	36	2	43.8
	4	3			24	3	
	3	4			28	4	
	2	5~6			12	5~6	
	1	7~12			6	7~12	
2	12	2	14.6	7	42	2	51.1
	8	3			28	3	
	6	4			21	4	
	4	5~6			14	5~6	
	2	7~12			7	7~12	
3	18	2	21.9	9	36	3	65.7
	12	3			27	4	
	9	4			18	5~6	
	6	5~6			9	7~12	
	3	7~12					
4	24	2	29.2	12	36	4	87.6
	16	3			24	5~6	
	9	4			12	7~12	
	8	5~6					
	4	7~12					
5	30	2	36.5	12 UP		2	—
	20	3				3	
	15	4				4	
	10	5~6				5~6	
	5	7~12				7~12	

DIMENSION

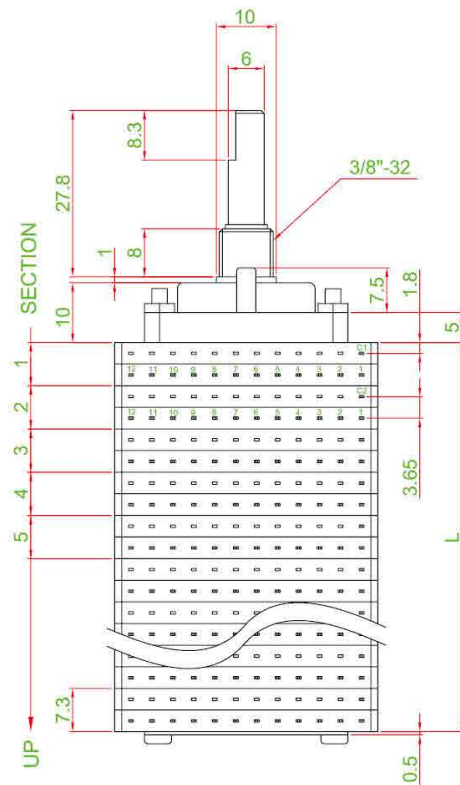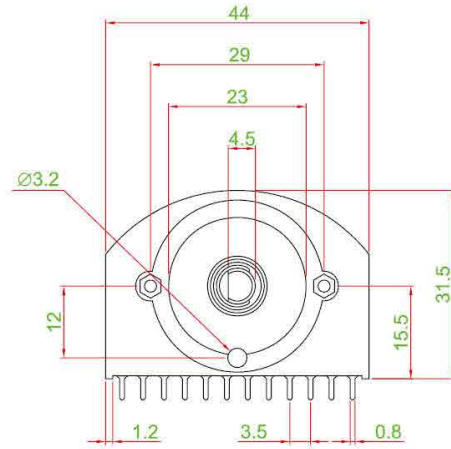

CIRCUIT



TRAVEL	SWITCHING POSITION	
0°	C1 - 1	C7 - 1
	C2 - 3	C8 - 3
	C3 - 5	C9 - 5
	C4 - 7	C10 - 7
	C5 - 9	C11 - 9
	C6 - 11	C12 - 11
30°	C1 - 2	C7 - 2
	C2 - 4	C8 - 4
	C3 - 6	C9 - 6
	C4 - 8	C10 - 8
	C5 - 10	C11 - 10
	C6 - 12	C12 - 12