

Feature :

Function selection of multi-position products
Signal selection of audios


Application :

Audio, public audio system





SWITCH SPECIFICATIONS	
POLE - POSITION	Function selection of multi-position products
CONTACT RATING	125 V AC , 0.3 A
CONTACT RESISTANCE	30 mΩ MAX. on DC 5V 1A Measured by Voltage Decreasing Method or Measured by 1 KHZ 2 mV MAX.
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	1.0 ± 0.5 kgf.cm
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C

● HOW TO ORDER


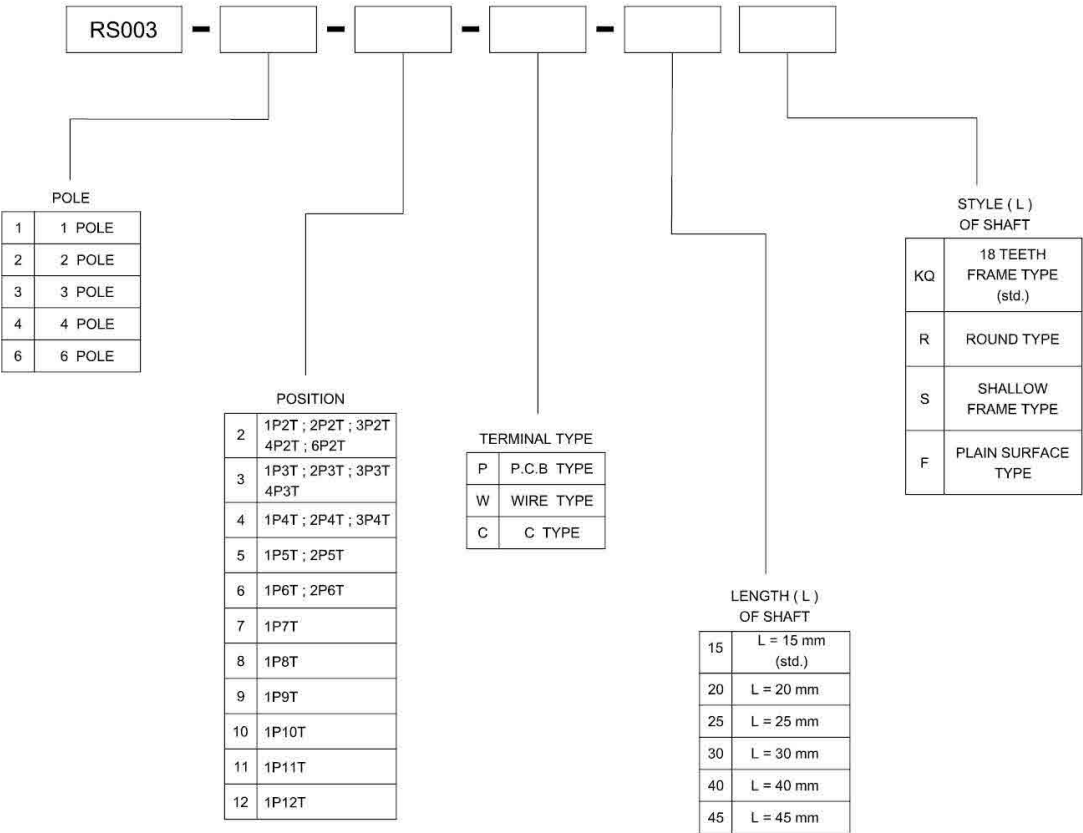


DIMENSION



• RS003-2-6-P-□ KQ

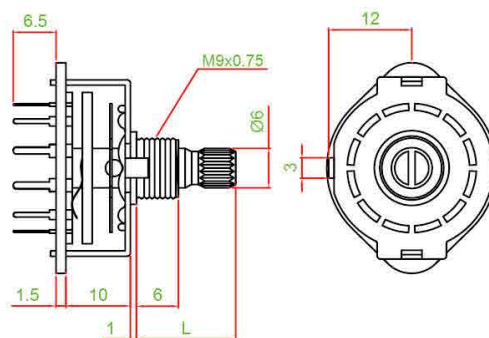

• RS003-2-6-W-□ KQ

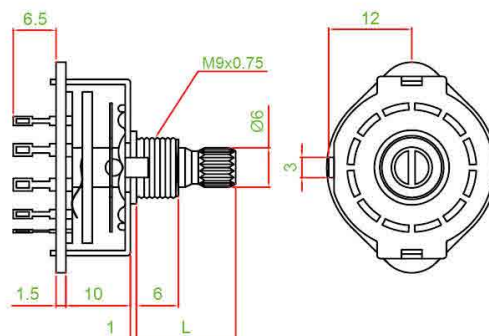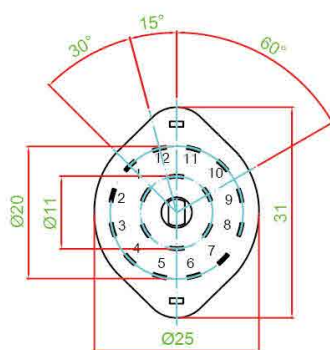


• RS003-1-6-C-□ F

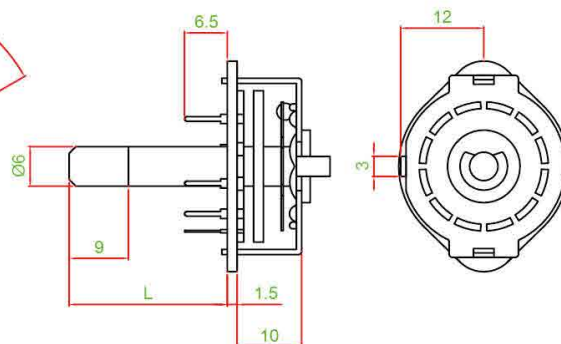


SHAFT TYPE


KQ TYPE
(18 TEETH FRAME)



R TYPE
(ROUND)



S TYPE
(SHALLOW FRAME)



F TYPE
(PLAIN SURFACE)

