


Feature :

- Compact size
- Reflow soldering available


Application :

- Consumer products
- Computer products
- Instrumentation
- Communication equipments
- Hand-held devices






POLE - POSITION	3P2T , SMT TYPE
CONTACT RATING	6 V DC , 0.3 A
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	200 ± 150gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	2.0 ± 0.2 mm

HOW TO ORDER




DIMENSION

• SS001-S32NAPA

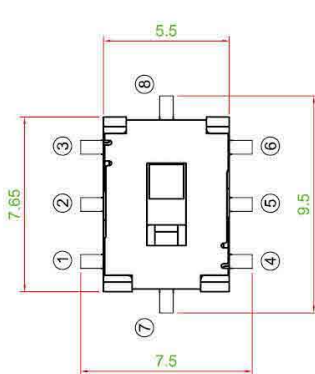

P.C.B. LAYOUT

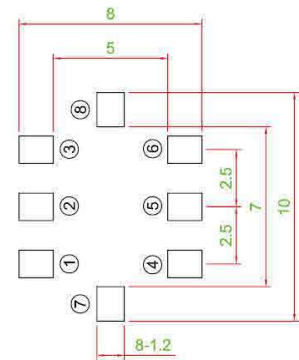

CIRCUIT

