

**Feature :**

Compact size  
PCB terminal


**Application :**

Consumer products  
Computer products  
Instrumentation  
Communication equipments  
Hand-held devices




POLE - POSITION	3P2T , P.C.B TYPE
CONTACT RATING	50 V DC , 0.5 A
CONTACT RESISTANCE	30 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	300 ± 150gf MAX.
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	3.8 ± 0.2 mm

### HOW TO ORDER




### DIMENSION

• SS002-P32NAPA2

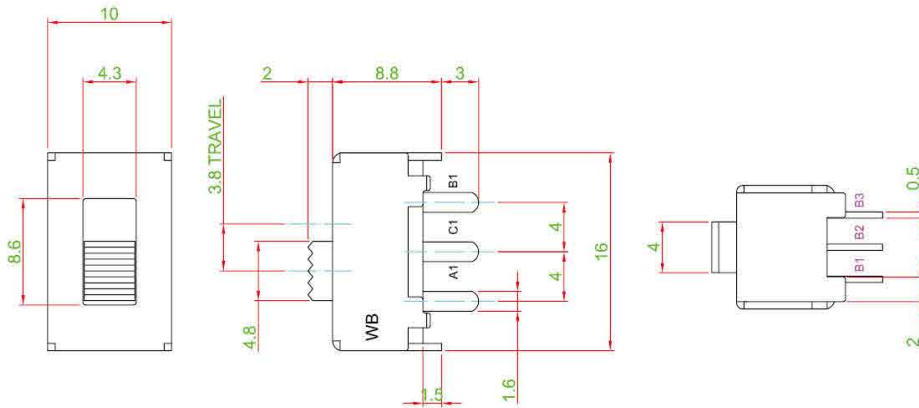

### CIRCUIT DIAGRAM



### P.C.B. LAYOUT

