

Feature -

- Compact size
- Reflow soldering available

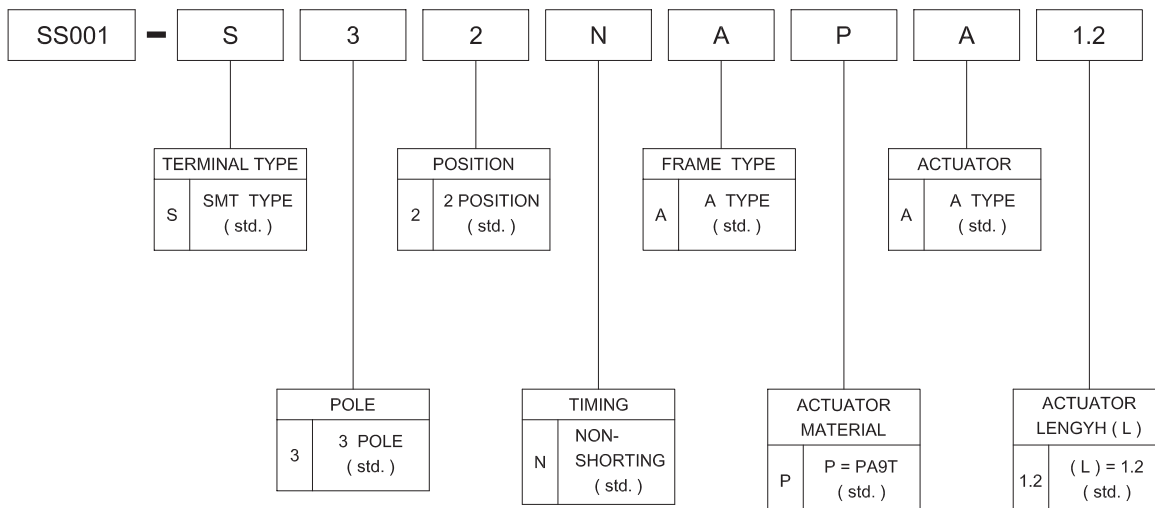
Applications -

- Consumer Products
- Instrumentation
- Computer Products
- Communication Equipments
- Hand-held devices

► SPECIFICATIONS

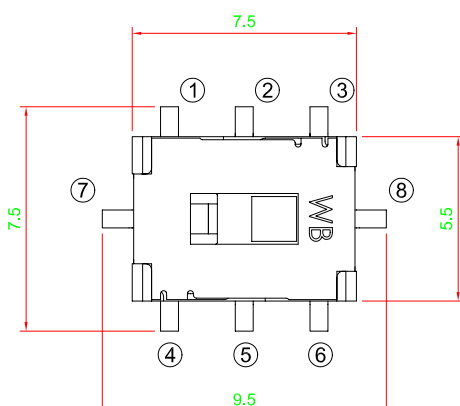
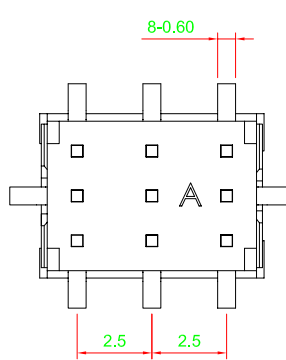
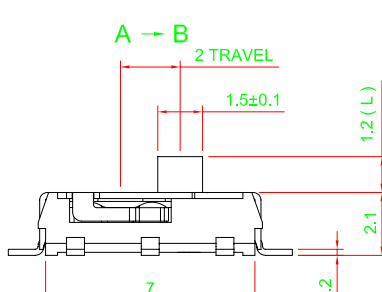

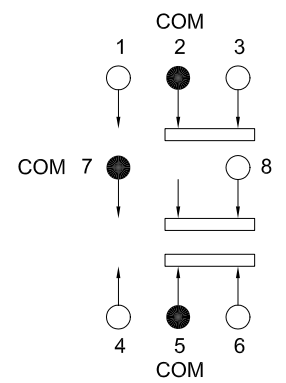
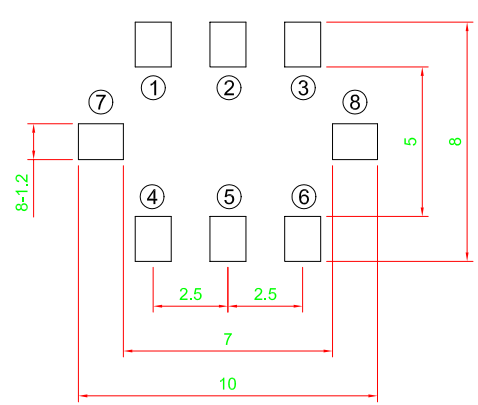
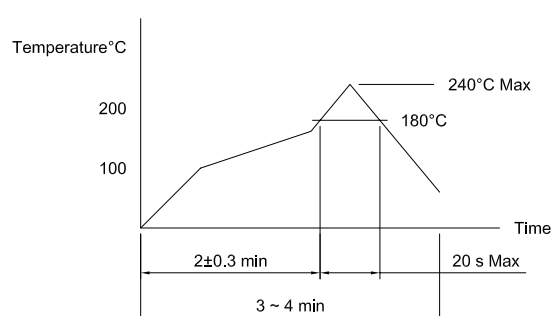
SWITCH SPECIFICATIONS	
POLE - POSITION	3P2T , SMT TYPE , Momentary action
CONTACT RATING	6 V DC , 0.3 A
CONTACT RESISTANCE	50 mΩ max . 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ min . 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	200 ± 150gf Max
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	2.0 ± 0.2 mm

► HOW TO ORDER



SS001 SERIES

MINIATURE SLIDE SWITCH

<p>▶ DIMENSION</p>	
<p>▶ SS001-S32NAPA1.2</p> <div style="display: flex; justify-content: space-around; align-items: flex-start;">   </div> <div style="display: flex; justify-content: space-around; align-items: flex-start; margin-top: 10px;">   </div>	
<p>▶ CIRCUIT DIAGRAM</p> 	<p>▶ P.C.B. LAYOUT</p> 
<p>▶ REFLOW SOLDERING</p> 	<p>▶ MATERIAL</p> <ul style="list-style-type: none"> ■ COVER - STAINLESS STEEL ■ ACTUATOR - PA9T ■ BASE FRAME - PA9T ■ TERMINAL - SILVER PLATING
<p>▶ UNIT WEIGHT</p> <ul style="list-style-type: none"> ■ SS001 - 0.2 ± 0.01 g / pcs 	