


# SLIDE MINI SWITCHES

## BS SERIES


DIMENSIONS (Unless otherwise specified, a tolerance of  $\pm 0.4$  mm applies to all dimensions.)

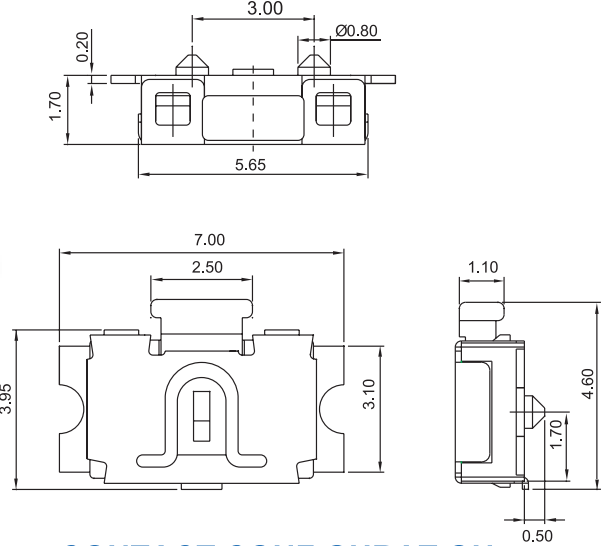

## SPECIFICATIONS

Contact Resistance (initial).....Max. 3 $\Omega$   
 Insulation Resistance (at 100VDC).....Min. 100M $\Omega$   
 Electrical Service Life.....200,000 operations  
 Electrical Operating Frequency.....30 operations per minute.  
 Storage Temperature Range..... -40°C to 85°C  
 Storage Humidity.....at 40°C, Max. 95% R.H

## CONTACT CONFIGURATION




## RATING

50 mA 30 VDC

## APPLICATION

MP3, PDA, DSC, Mobile Phone

## MOUNTING HOLES



## ORDERING INFORMATION

