

Feature :

Compact size 0.9 mm height
Good double action
Tactile feeling


Application :

Shutter of still cameras
And video cameras




SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , 1P2T
CONTACT RATING	12 V DC , 50 mA
CONTACT RESISTANCE	100 mΩ MAX. 5 V DC ; 1 A , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute
OPERATING FORCE	1*st 80 ± 40 gf ; 2*nd 250 ± 60 gf
OPERATING LIFE	30,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	1*st 0.25 ± 0.1 mm ; 2*nd 0.4 ± 0.15 mm

HOW TO ORDER


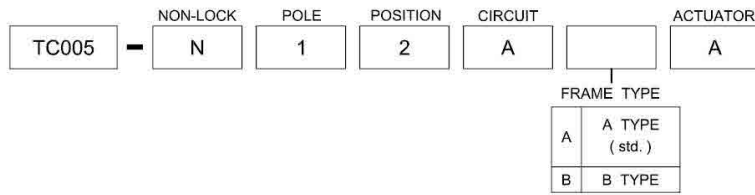


DIMESION

• TC005-N12AAA

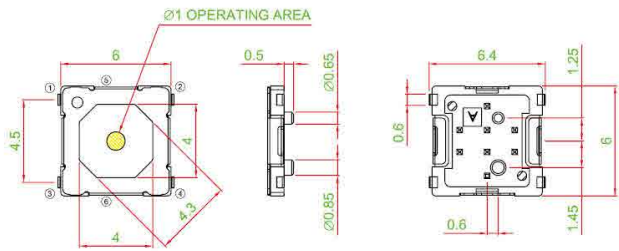

• TC005-N12ABA

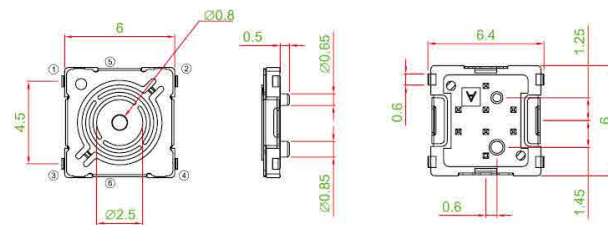

CIRCUIT

