

Feature :

SPST
Mini in dimension
2.9x3.9x2.5mm


Application :

Consumer products
Computer products
Instrumentation
Communication equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , SPST
CONTACT RATING	12 V DC , 50 mA
CONTACT RESISTANCE	100 mΩ MAX. 5 V DC ; 1 A , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 100 V AC for 1 Minute
OPERATING FORCE	160 ± 50 gf
OPERATING LIFE	100,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	0.15 ± 0.10 mm

HOW TO ORDER

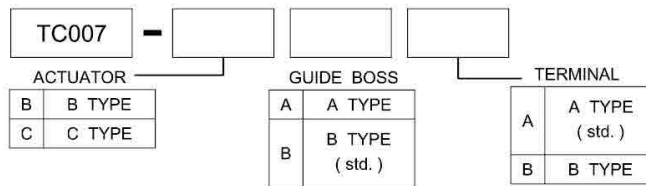


DIMENSION



• TC007- BBA

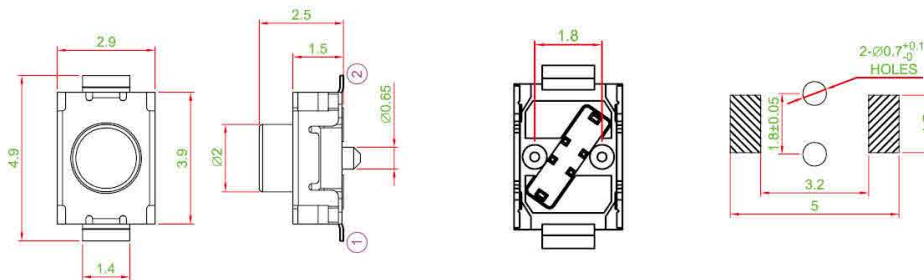



CIRCUIT



ACTUATOR



GUIDE BOSS



TERMINAL

