

Feature :

Medium size
Click function


Application :

Consumer products
Computer products
Instrumentation
Communication equipment




SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , SPST
CONTACT RATING	VOLTAGE RANGE : 3V ~14V DC , CURRENT RANGE : 1mA ~ 10 mA (DC)
CONTACT RESISTANCE	100 mΩ MAX. 1.5 V DC ; 0.1 A , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	230 ± 50 gf
OPERATING LIFE	100,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	0.4 ± 0.05 mm

HOW TO ORDER

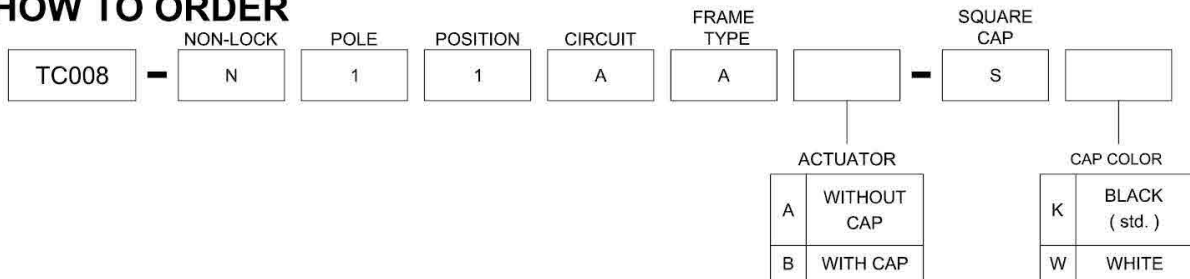

DIMENSION

• TC008-N11AAA

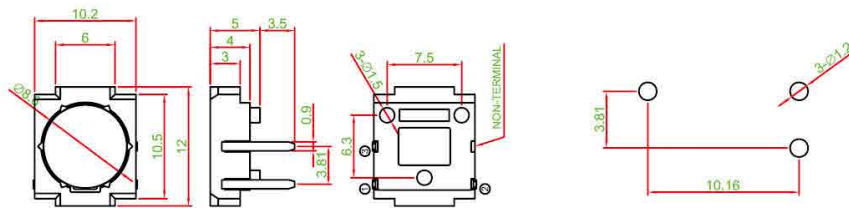

CAP TYPE



CIRCUIT

