

Feature :

Water proof IP67 sealed
Mini in dimension
SMT, right angle and vertical PCB terminal


Application :

Consumer products
Computer products
Instrumentation
Communication equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , SPST
CONTACT RATING	12 V DC , 50 mA
CONTACT RESISTANCE	100 mΩ MAX. 5 V DC ; 1 A , by Method of Voltage DROP
INSULATION RESISTANCE	1000 MΩ MIN. 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute
OPERATING FORCE	200 ± 80 gf ; 450 ± 150 gf
OPERATING LIFE	500,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	0.45 ± 0.15 mm
SEALING	IP67

● HOW TO ORDER

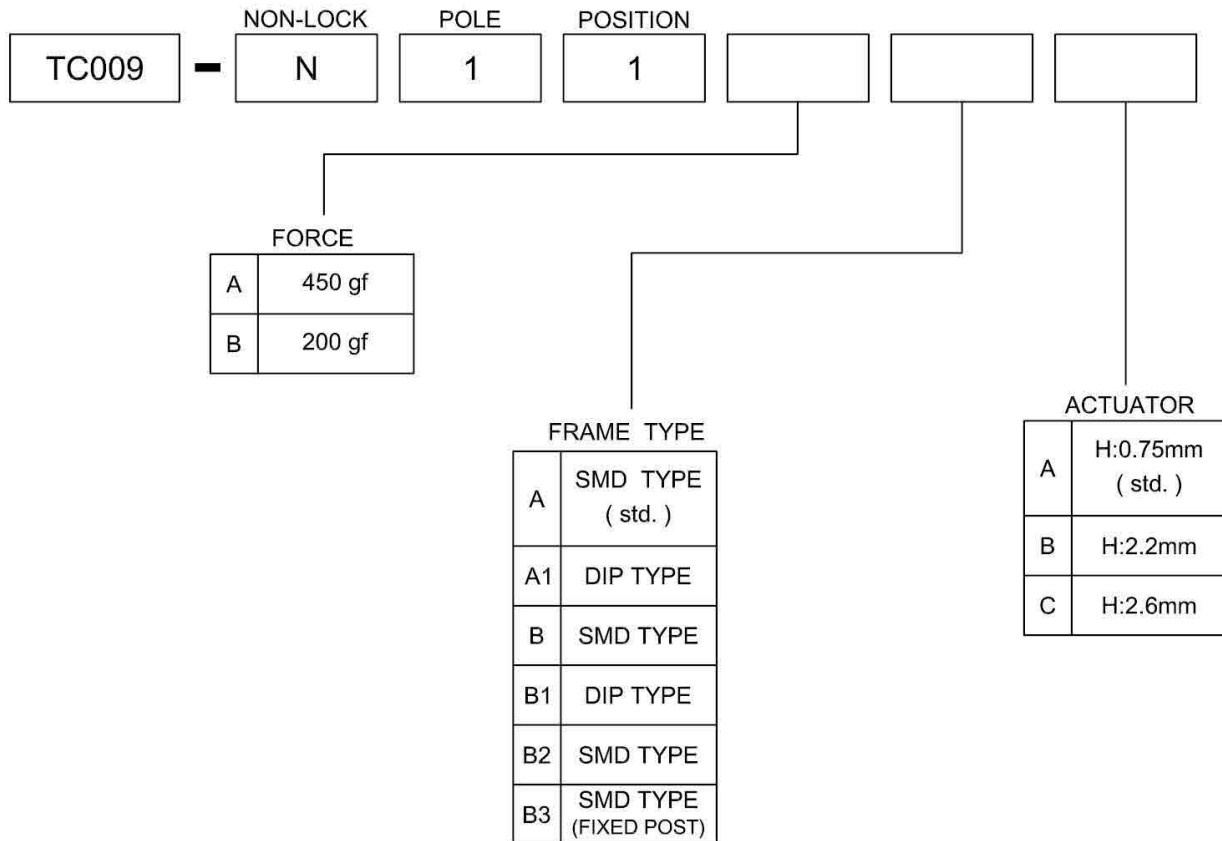


DIMENSION


• TC009-N11AAA

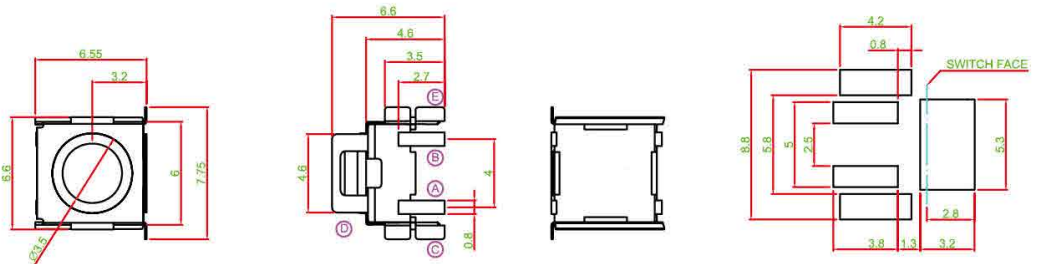


• TC009-N11AA1B

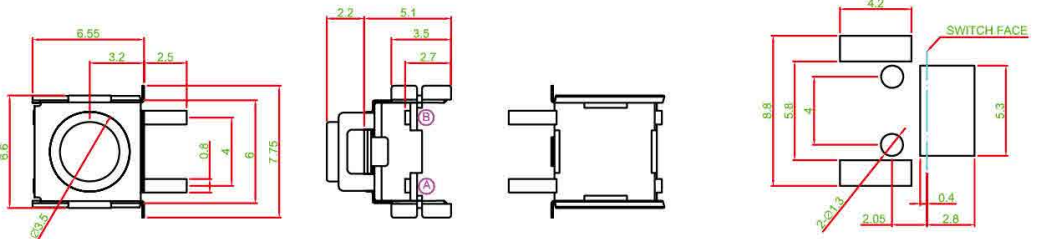


• TC009-N11AB3A

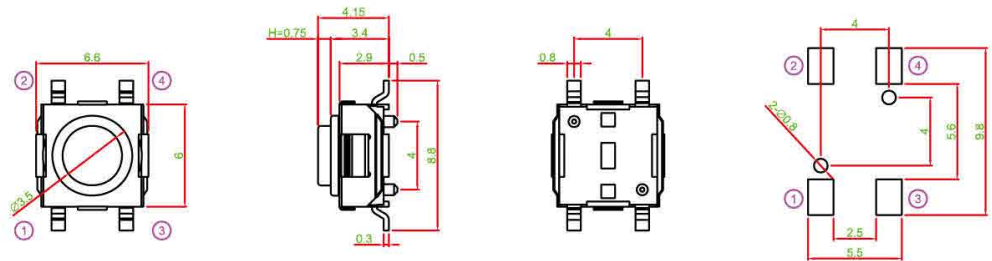


• TC009-N11AB1B

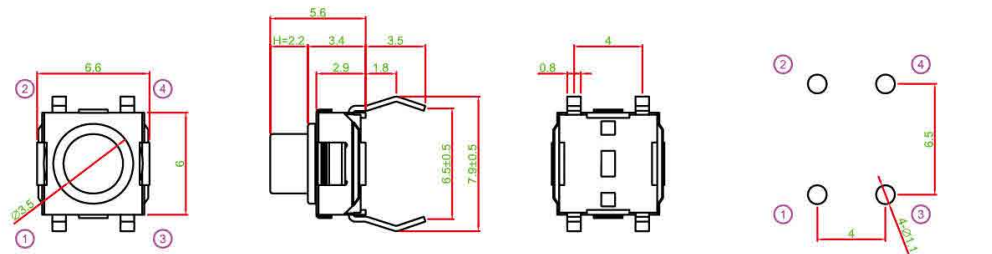

• TC009-N11BBC

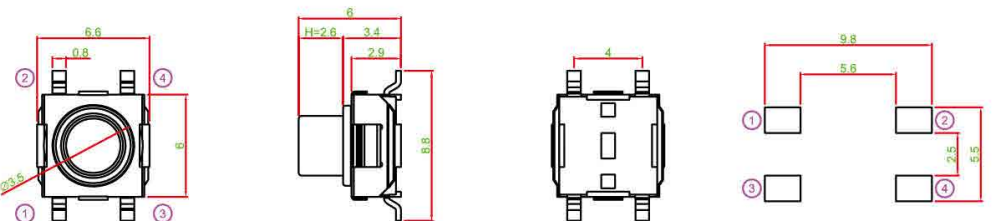

• TC009-N11BB2C

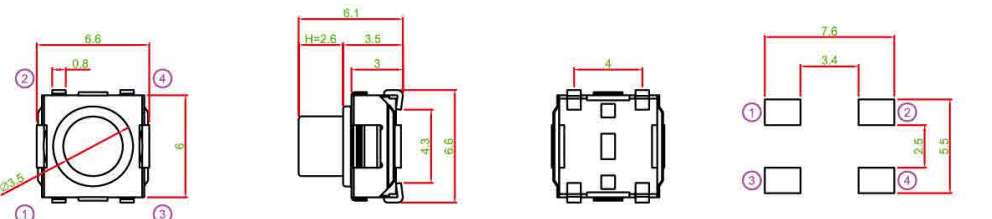

CIRCUIT

