TC014 SERIES

Feature:

Water proof IP67 sealed Bi-color LED illuminated available Long electrical life cycles Good tactile feeling

Application:

Consumer products
Computer products
Instrumentation
Communication equipments




SWITCH SPECIFICATIONS					
POLE - POSITION	Momentary action , SPST 20 V DC , 1 mA				
CONTACT RATING					
CONTACT RESISTANCE	200Ω MAX. 5 V DC ; 1 mA , by Method of Voltage DROP				
INSULATION RESISTANCE	100 MΩ MIN. 100 V DC for 1 minute				
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute				
OPERATING FORCE	125 ± 50 gf				
OPERATING LIFE	500,000 cycles				
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C				
TOTAL TRAVEL	1.3 ± 0.1 mm				
SEALING	IP67				

	LED	SPECI	FICATIO	NS					
ATTENTION LEDs are Electrostatic Sensitive devices	Unit	Value / LED Color							
		Blue	Pure Green	Red	Yellow	Orange	Green	White	
LUMINOUS INTENSITY@20mA lv	mcd	80	150	220	180	320	50	450	
Dominant Wavelength λD	nm	465	525	630	590	601	567	ì	
FORWARD VOLTAGE@20mA Vf	V	3.3	3.2	1.95	2	2.1	2.1	3.3	


A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing



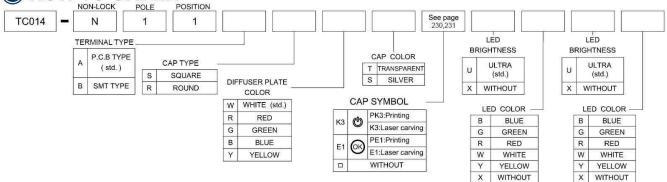

CIRCUIT

DIMENSION



SINGLE COLOR



