

Feature :

- Noiseless, conductive rubber
- Light click feeling
- Full color LED illuminated available
- Long electrical life cycles

Application :

- Audio / video products
- Instrumentation
- Communication equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	OFF - <ON> for Momentary Type , SPST
CONTACT RATING	1mA 20V DC
CONTACT RESISTANCE	200Ω MAX.
INSULATION RESISTANCE	100 MΩ min. 100 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute
OPERATING FORCE	160 ± 40 gf , 240 ± 60 gf
OPERATING LIFE	500,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	1.6 ± 0.3 mm

LED SPECIFICATIONS								
ATTENTION LEDs are Electrostatic Sensitive devices LEDs are Electrostatic Sensitive devices	Unit	Value / LED Color						
		Blue 5mA	Pure Green	Red	Yellow	Orange	Green	White
LUMINOUS INTENSITY@20mA I _v	mcd	100	413	230	150	250	50	200
Dominant Wavelength λ _D	nm	470	525	630	590	601	570	/
FORWARD VOLTAGE@20mA V _f	V	3.3	3.3	1.95	2	2.1	2.1	2.1





■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

HOW TO ORDER




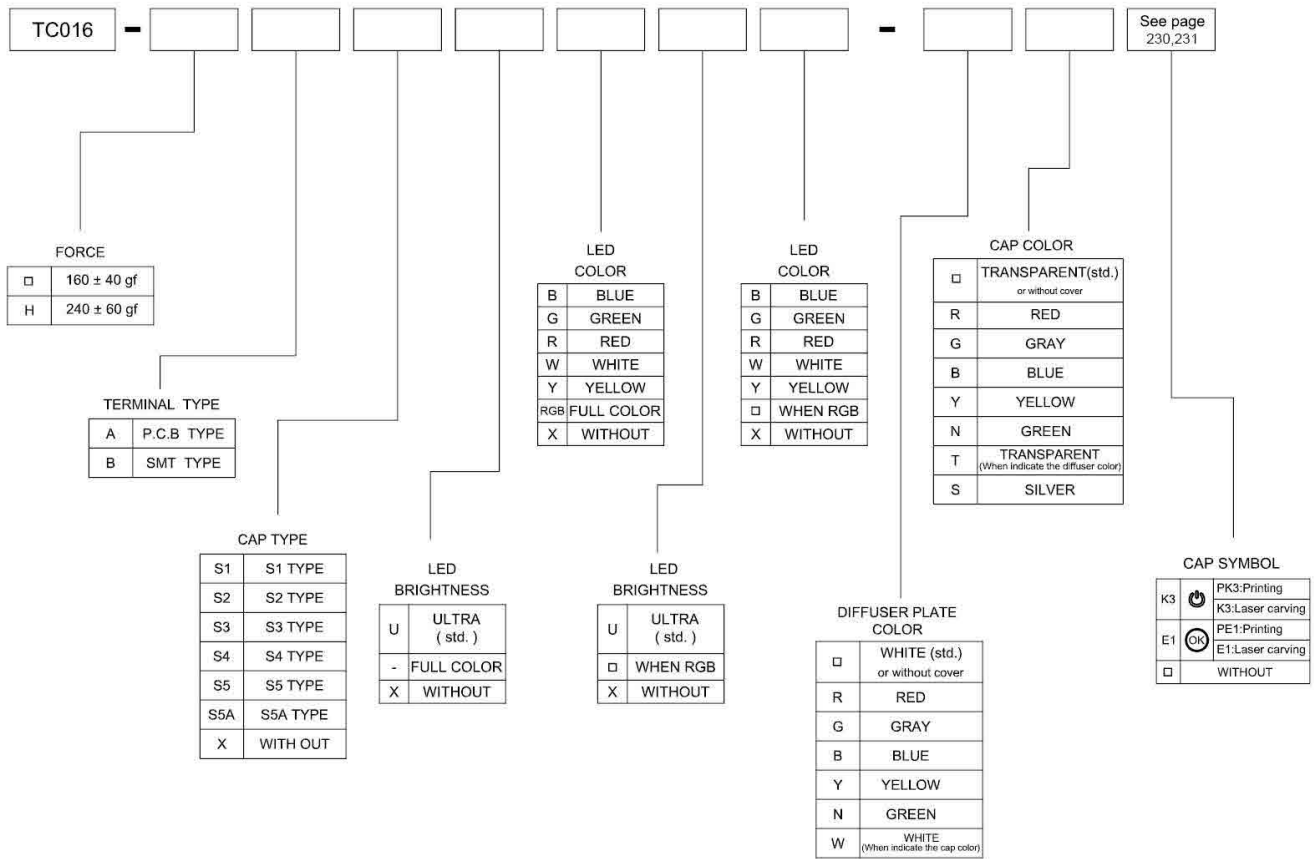


● TERMINAL TYPE





• TC016-AX □□□□



• TC016-AX-RGB





• TC016-BX □□□□





● CAP TYPE





• S1 TYPE





• S2 TYPE





• S3 TYPE





• S4 TYPE



• S5 TYPE



• S5A TYPE







● CIRCUIT

SINGLE COLOR

TWO COLOR

FULL COLOR



S5 & S5A PANEL CUT OUT	W
PANEL THICK	W
0.75 ~ 1.25	18.8 ~ 18.9
1.25 ~ 2.0	18.9 ~ 19.0
2.0 ~ 3.0	19.0 ~ 19.1