


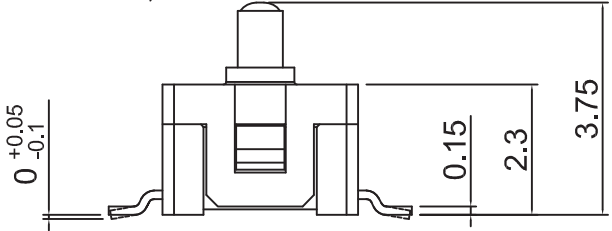



DIMENSION	TOLERANCE
BELOW 10 mm	± 0.3
10~100 mm	± 0.5
ABOVE 100 mm	± 0.8
ANGLE	± 3°

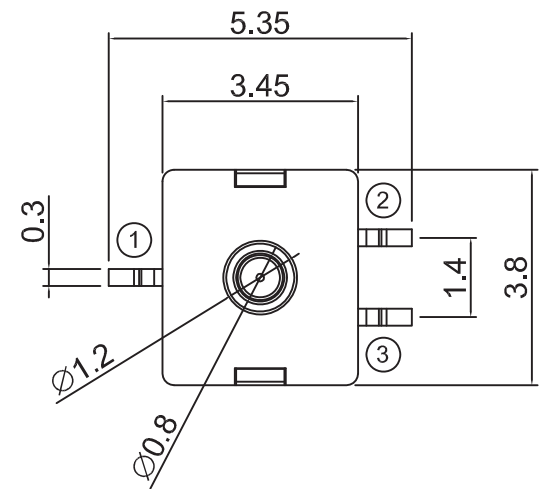

SCHEMATIC

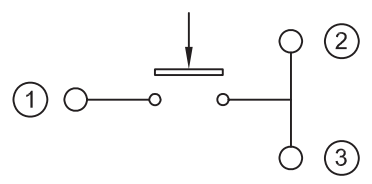

P.C.B. LAYOUT

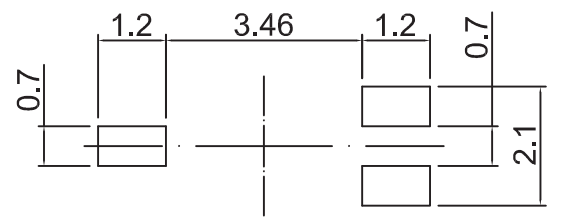

SPECIFICATION :

1. RATING : 12VDC. 50mA.
2. CONTACT RESISTANCE : 100mΩ MAX.
3. INSULATION RESISTANCE : 100VDC-100MΩ MIN.
4. WITHSTAND VOLTAGE: 250VAC-1 MINUTE.
5. OPERATING FORCE : 160±50gf.
6. TRAVEL: 0.2±0.10mm.
7. MECHANICAL LIFE CYCLE : 100,000 CYCLES.
ELECTRICAL LIFE CYCLE : 50,000 CYCLES.

△				DATE	2012/10/04	UNIT	mm	MODE	TACT SWITCH
△				APPROVAL	KAVEN	SCALE	1 : 1	PART	TC021-N11AAA
△				CONFIRM		VIEW	⊕	2D FILE NAME	TC021-N11AAA
	DATE	APPROVAL	DESIGN	ENGINEERING CHANGE DESCRIPTION	DESIGN	Gulinfeng	VER.	01	3D FILE NAME

