

Feature :

Illuminated LED and bi-color available
Special thickness transparent cap
Customer symbol available

Application :

Audio device
Video Controller




SWITCH SPECIFICATIONS	
POLE - POSITION	1P1T , with LED
CONTACT RATING	12 V DC , 100 mA
CONTACT RESISTANCE	200 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	50 MΩ MIN. 250 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	125 ± 50 gf
OPERATING LIFE	1,000,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	0.3 ± 0.1 mm


LED SPECIFICATIONS		Value / LED Color						
	Unit							
		Blue	Pure Green	Red	Yellow	Orange	Green	White
LUMINOUS INTENSITY@20mA Iv	mod	/	/	85	/	/	140	/
Dominant Wavelength λD	nm	/	/	632	/	/	571	/
FORWARD VOLTAGE@20mA Vf	V	/	/	2.2	/	/	2.2	/

■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing


HOW TO ORDER

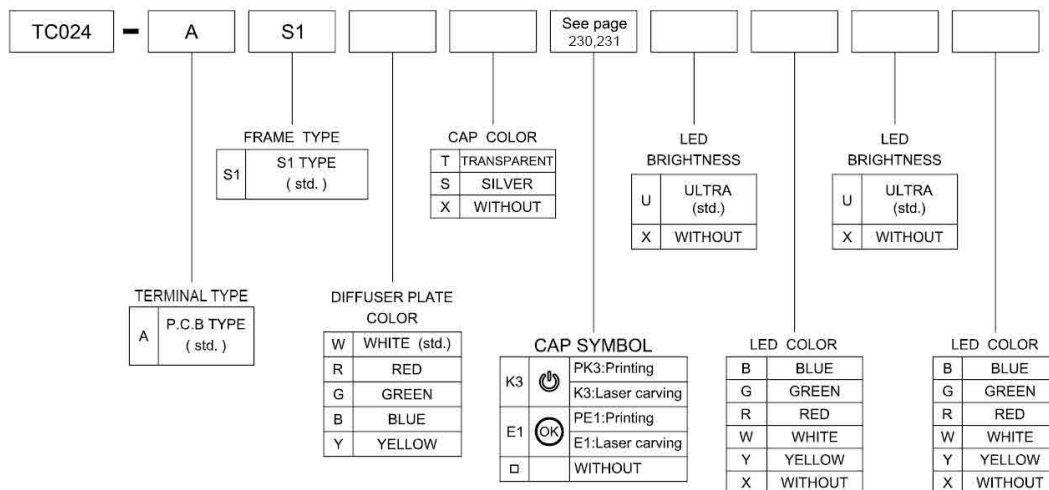

DIMENSION

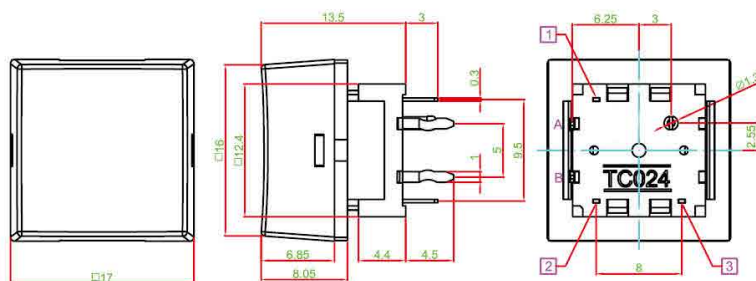

CIRCUIT



P.C.B. LAYOUT

