



淮 洋 有 限 公 司 HUI YANG CO.,LTD.

TEL : 886-2-8261-8986 FAX : 886-2-8261-1885

www.hy1688.com.tw 236新北市土城區中央路二段191號10樓之5



Feature -

6x6 mm tact switch
SMT terminal


Application -

consumer products
computer products
instrumentation
communication equipments

► SPECIFICATIONS


SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , SPST
CONTACT RATING	12 V DC , 50 mA
CONTACT RESISTANCE	100 mΩ MAX. 1.5 V DC ; 0.1 A , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute
OPERATING FORCE	160 ± 50 gf
OPERATING LIFE	500,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	0.2 ± 0.1 mm

► HOW TO ORDER

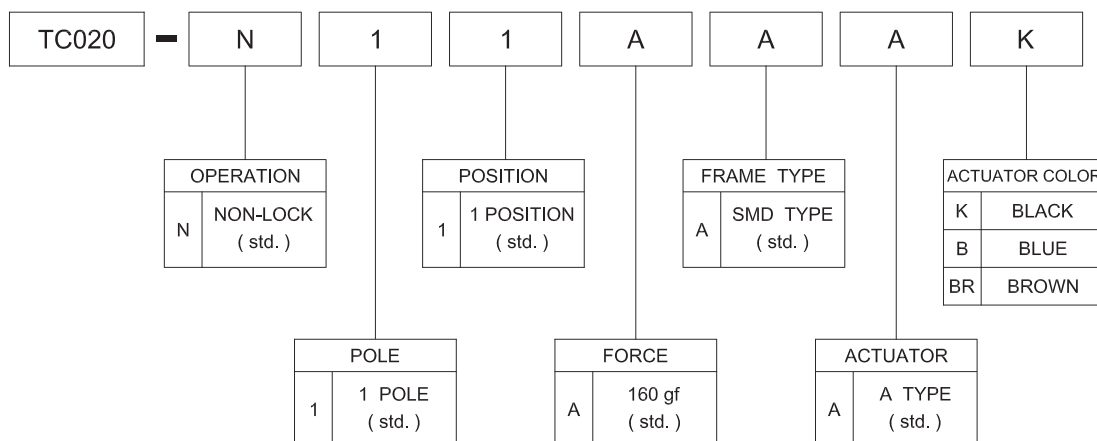


► DIMENSION


TC020-N11AAK

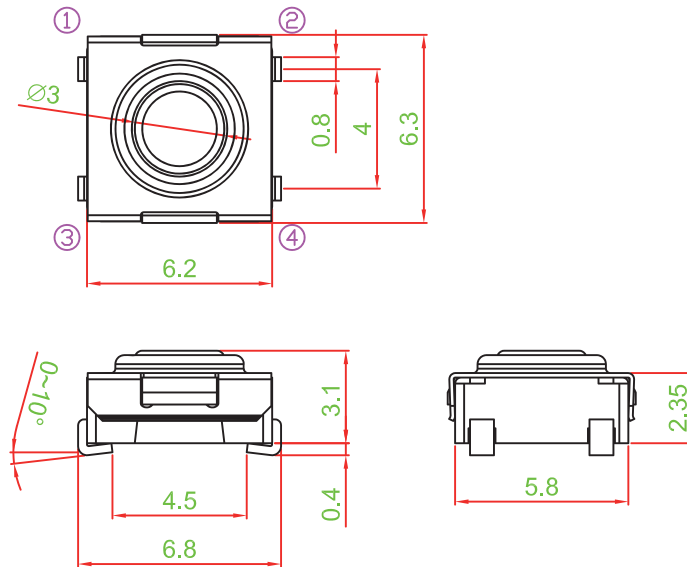

► CIRCUIT



► P.C.B LAYOUT

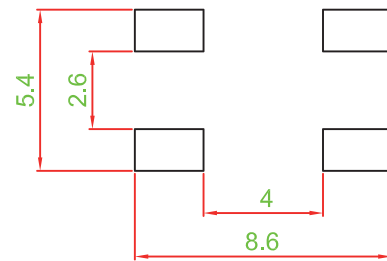

► MATERIAL

- ACTUATOR : PA+GF
- TERMINAL : BRASS SILVER PLATING
- COVER : STAINLESS STEEL
- SPRING PLATE : STAINLESS STEEL
- BASE FRAME : PA+GF