


A

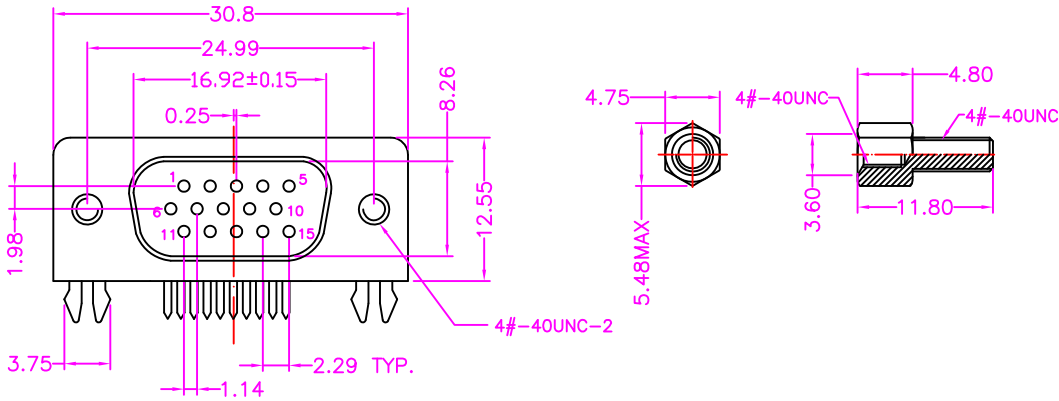


MATERIALS

HOUSING: PBT (UL 94V-0), BLUE
 SHELL: STEEL, NICKEL PLATING
 BOARD LOCK: BRASS, TIN PLATING
 HEX NUT: BRASS, NICKEL PLATING
 TERMINAL: BRASS, GOLD PLATED ON CONTACT AREA
 TIN PLATED ON SOLDER TAIL


SPECIFICATION

CURRENT RATING: 5 AMP MAX
 DIELECTRIC WITHSTANDING: 1000V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -55°C~+105°C

B

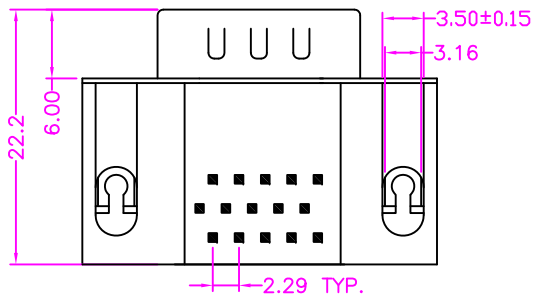


PART NUMBER

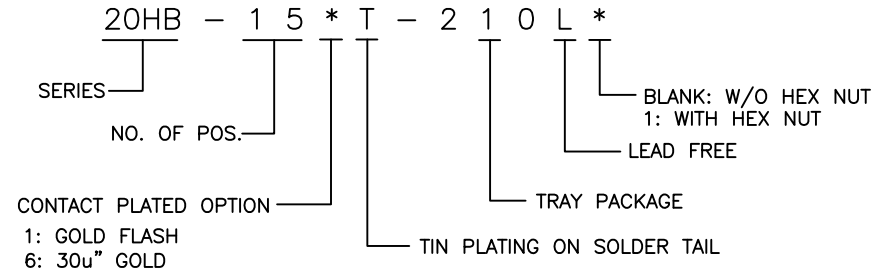

A

B

C

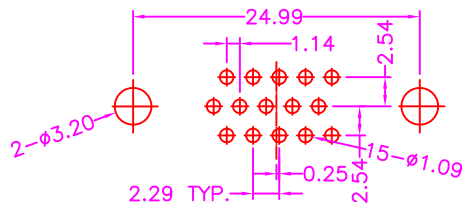

P.C.B LAYOUT
TOP VIEW ±0.05

C

D

淮洋有限公司 HUAI YANG CO., LTD		SERIES: D-SUB CONNECTOR SERIES	
LINEAR: .X±0.30 .XX±0.20 .XXX±0.10 ANGLES: ±3°		TITLE: HIGH DENSITY D-SUB, PCB MOUNT, R/A, FOOTPRINT 8.89mm, METAL SHIELD, MALE	
APPROVALS DRAWN: <i>Lion</i> CHECKED: <i>Eric</i> APPROVED: <i>James</i>		SIZE: A4 SCALE: NONE	VERSION: A DWG NO.: 20HB-001 UNIT: mm SHEET: 1 OF 1
		10084	

D

A	RELEASE	2008.5.29
REV.	DESCRIPTION	DATE

1

2

3

4