

1


2

3

4

A

A

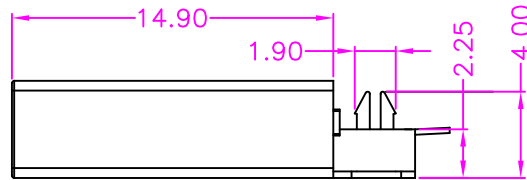

MATERIALS




HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATING
 BOARDLOCK: COPPER ALLOY, TIN PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION


CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+85°C

B

B

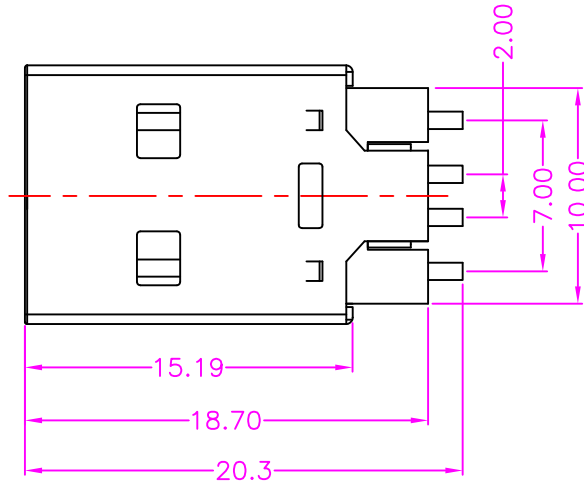


PART NUMBER

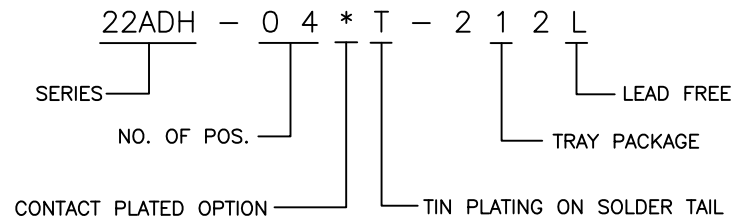

- 1: GOLD FLASH
- 2: 5u" GOLD
- 3: 10u" GOLD
- 4: 15u" GOLD
- 6: 30u" GOLD

C

C

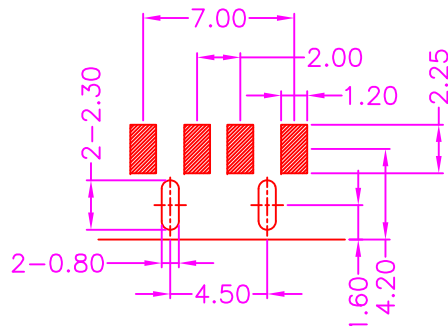

P.C.B. LAYOUT TOP VIEW ±0.05

D

D

淮洋有限公司 HUAI YANG CO., LTD.		SERIES: USB CONNECTOR SERIES	
LINEAR: .XX±0.20 .XXX±0.10		TITLE: USB A TYPE, PCB MOUNT, SMT BOARD CUT, METAL SHIELD, MALE, WITH BOARDLOCK	
ANGLES: ±3°	APPROVALS DRAWN: <i>Mans</i> CHECKED: <i>Lion</i> APPROVED: <i>James</i>	SIZE: A4 VERSION: A	DWG NO. 22AD-003
	10021	SCALE: NONE	UNIT: mm SHEET: 1 OF 1

A	RELEASE	2009.4.10
REV.	DESCRIPTION	DATE

1

2

3

4