
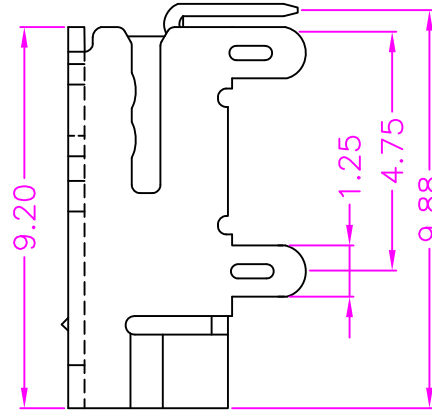


1 2 3 4

A

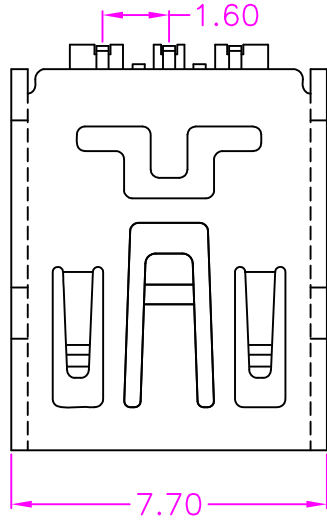



MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 100V
 OPERATION TEMPERATURE: -0°C~+50°C

B

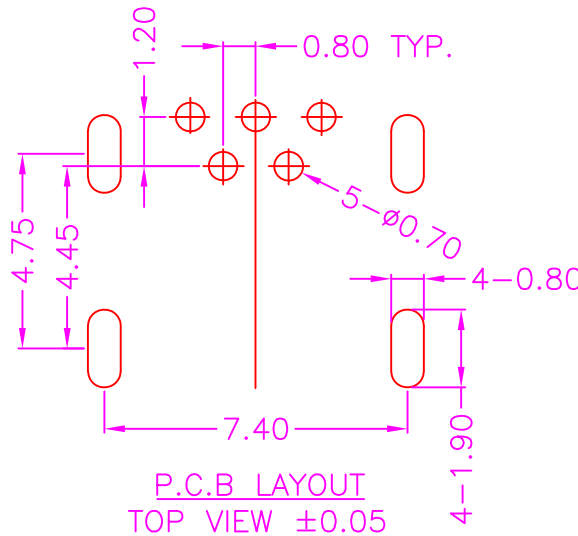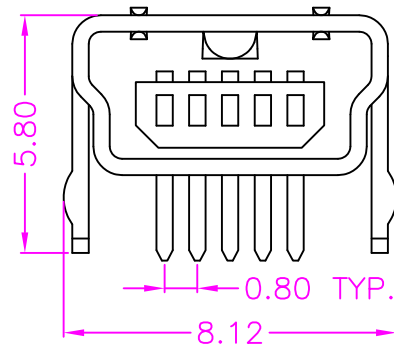

PART NUMBER

22MHH - 0 5 * T - 1 1 2 L
 SERIES - NO. OF POS. - CONTACT PLATED OPTION - TRAY PACKAGE - LEAD FREE - TIN PLATING ON SOLDER TAIL

- 1: GOLD FLASH
- 2: 5u" GOLD
- 3: 10u" GOLD
- 4: 15u" GOLD
- 6: 30u" GOLD

C

D

淮洋有限公司 HUAI YANG CO., LTD.		SERIES: USB CONNECTOR SERIES	
LINEAR: .X±0.30 .XX±0.20 .XXX±0.10 ANGLES: ±3°		TITLE: MINI USB, B TYPE, PCB MOUNT, SMT, METAL SHIELD, FEMALE	
APPROVALS DRAWN: <i>Mans</i> CHECKED: <i>Lion</i> APPROVED: <i>James</i>		SIZE: A4 VERSION: A DWG NO.: 22MH-003	
10124		SCALE: NONE UNIT: mm SHEET: 1 OF 1	

A	RELEASE	2009.4.23
REV.	DESCRIPTION	DATE

1 2 3 4