

1


2

3

4

A

A

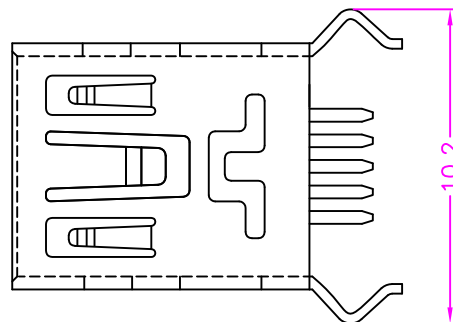

MATERIALS



HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION


CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 100V
 OPERATION TEMPERATURE: -0°C~+50°C

B

B

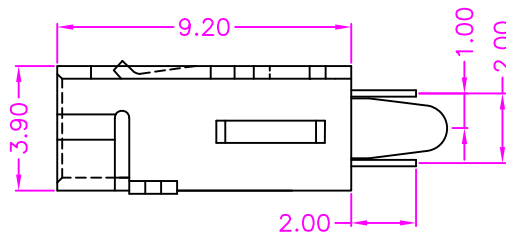

PART NUMBER

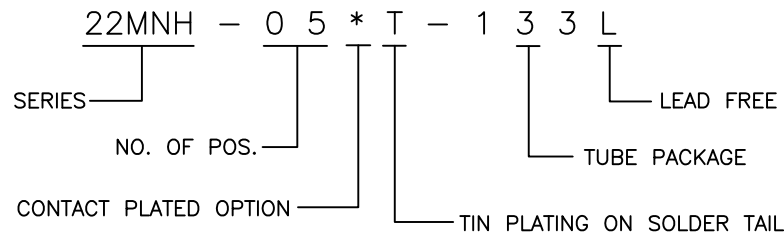


CONTACT PLATED OPTION


- 1: GOLD FLASH
- 2: 5u" GOLD
- 3: 10u" GOLD
- 4: 15u" GOLD
- 6: 30u" GOLD

C

C

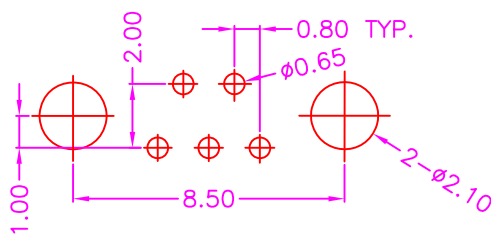

P.C.B. LAYOUT
 TOP VIEW ±0.05

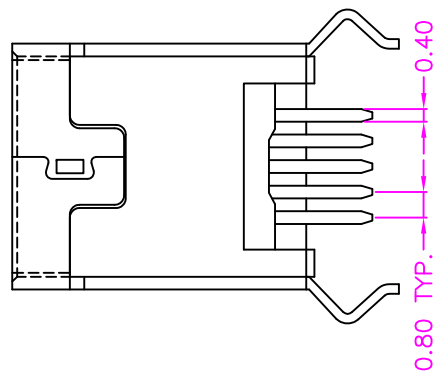

D

D

淮洋有限公司 HUAI YANG CO., LTD.		SERIES: USB CONNECTOR SERIES	
LINEAR: .X±0.30 .XX±0.20 .XXX±0.10		TITLE: MINI USB, PCB MOUNT, VERTICAL, METAL SHIELD, FEMALE	
ANGLES: ±3°		APPROVALS DRAWN: <i>Mans</i> CHECKED: <i>Lion</i> APPROVED: <i>James</i>	
		SIZE: A4	VERSION: A
10124		DWG NO. 22MN-004	
		SCALE: NONE	UNIT: mm
		SHEET: 1 OF 1	

A	RELEASE	2009.4.9
REV.	DESCRIPTION	DATE

1

2

3

4