

1






2

3

4

A

A

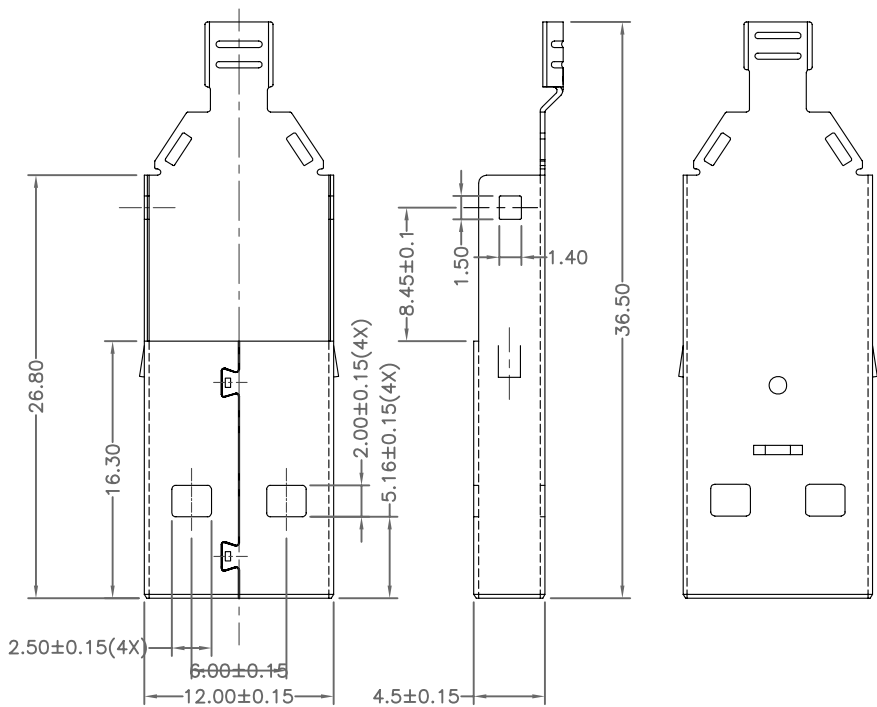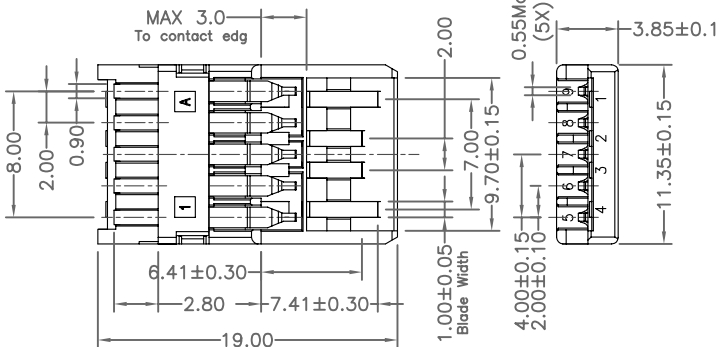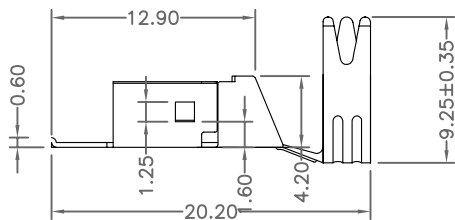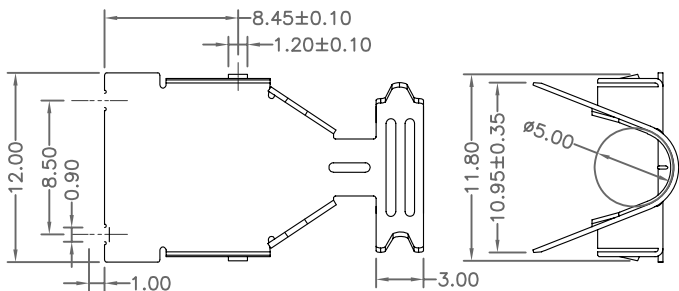

MATERIALS

HOUSING: HI-TEMP PLASTIC (UL 94V-0)
 SHELL: SPCC, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER

22PE - 0 9 * T - 2 4 5 L

SERIES: 22PE
 NO. OF POS.: 09
 CONTACT PLATED OPTION: *
 TIN PLATING ON SOLDER TAIL: T
 BAG PACKAGE: 2
 LEAD FREE: 4
 5
 L

1: GOLD FLASH
 2: 5u" GOLD
 3: 10u" GOLD
 4: 15u" GOLD
 6: 30u" GOLD

B

B

C

C

D

D

A	RELEASE	2010.7.2
REV.	DESCRIPTION	DATE

淮洋有限公司 HUAI YANG CO., LTD.		SERIES: USB CONNECTOR SERIES	
LINEAR: .X±0.30 .XX±0.20 .XXX±0.10		TITLE: USB 3.0 A TYPE, SOLDER WIRE, METAL SHIELD, MALE	
ANGLES: ±3°		SIZE: A4 VERSION: A DWG NO. 22PE-006	
APPROVALS DRAWN: Ron CHECKED: Eric APPROVED: James		SCALE: NONE UNIT: mm SHEET: 1 OF 1	

1

2

3

4