




# COVER SHELL

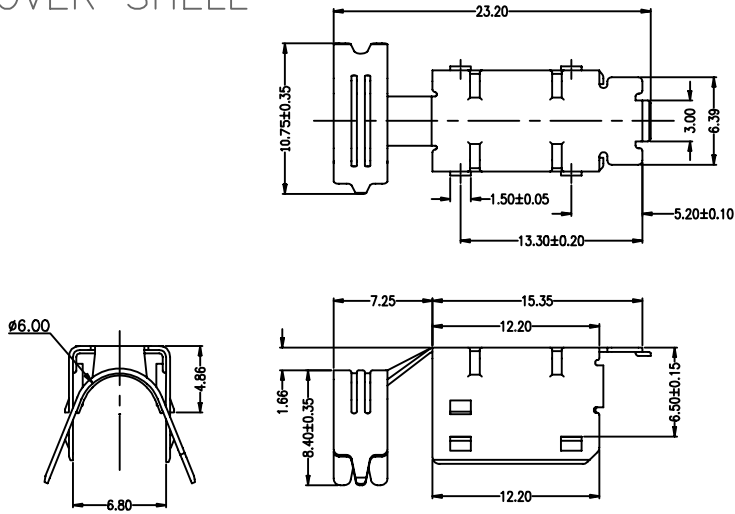

# FRONT SHELL

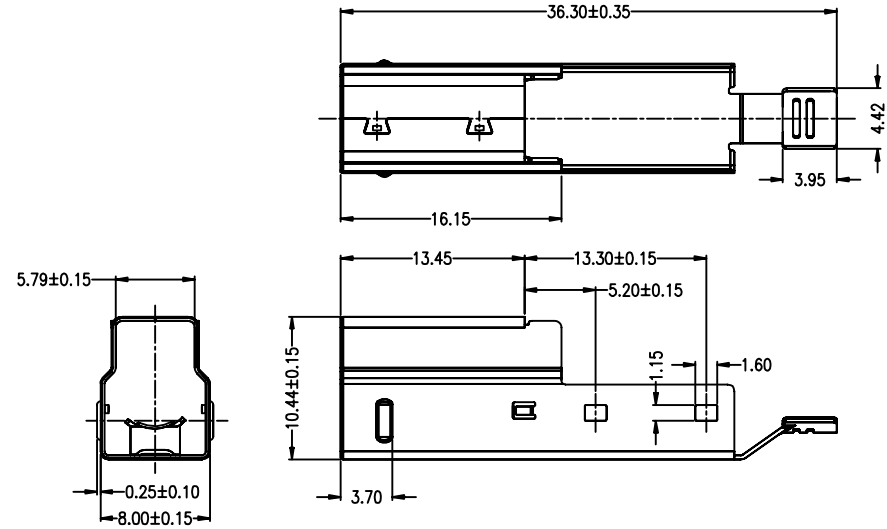


# HOUSING & CONTACT

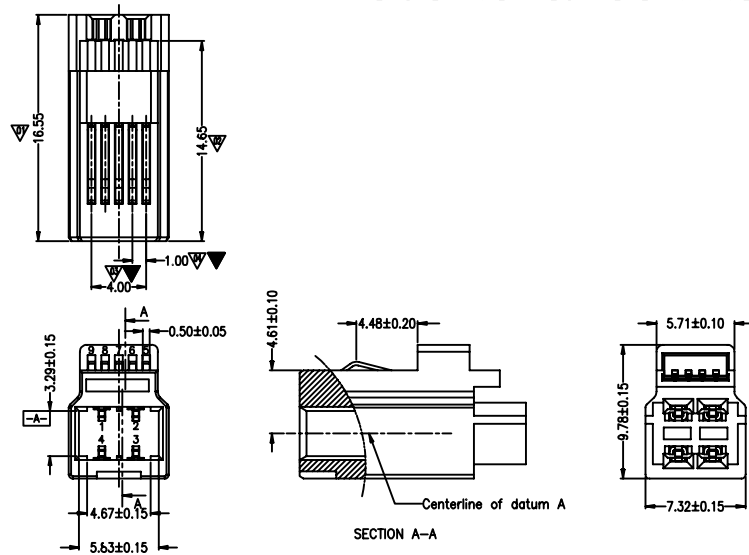

## Specification

- Material  
SHELL : STAINLESS STEEL  
HOUSING : THERMPOLYMER  
CONTACT : COPPER ALLOY GOLD PLATING  
TI-PLATING ON SOLDER TAIL AREA
- CURRENT RATING  
1.8 AMP FOR PIN1 & PIN4  
0.25 AMP FOR OTHER CONTACTS
- VOLTAGE RATING : 30V
- INSULATION RESISTANCE : 100MΩ MIN
- CONTACT RESISTANCE  
30mΩ MAX FOR PIN1 & PIN4  
50mΩ MAX FOR OTHER CONTACTS
- DIELECTRIC WITHSTANDING VOLTAGE : 100V AC
- TEMPERATURE RANGE : -20°C TO +85°C

## PART NUMBER

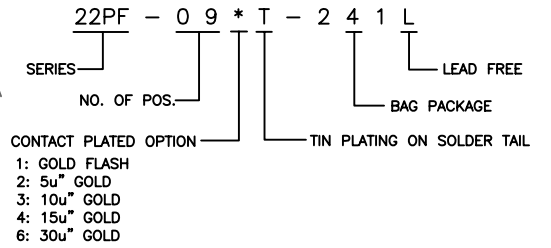

淮洋有限公司 HUAI YANG CO., LTD.		SERIES: USB CONNECTOR SERIES	
LINEAR: .X±0.30 .XX±0.20 .XXX±0.10		TITLE: SUB 3.0 B TYPE, SOLDER WIRE, METAL SHIELD, MALE	
ANGLES: ±3°		SIZE: A4    VERSION: A    DWG NO. 22PF-002	
APPROVALS DRAWN: Ron CHECKED: Eric APPROVED: James		SCALE: NONE    UNIT: mm    SHEET: 1 OF 1	
10171			

A	RELEASE	2010.6.17
REV.	DESCRIPTION	DATE