
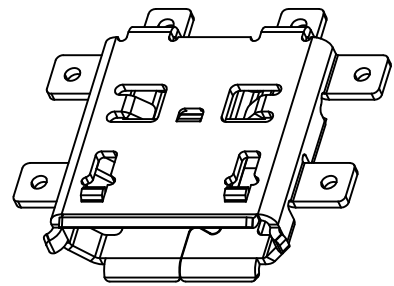


1 2 3 4

A

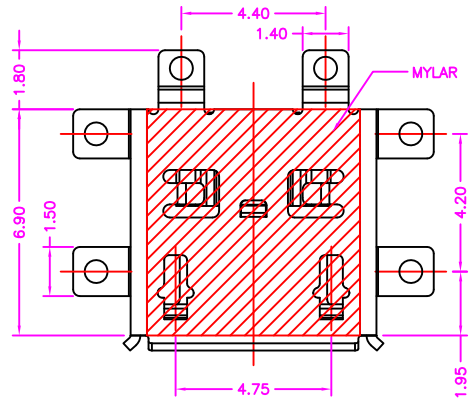



**MATERIALS**

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)  
 SHELL: STAINLESS STEEL, TIN PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATED



**SPECIFICATION**

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX  
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -25°C~+105°C

B

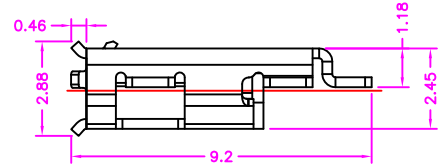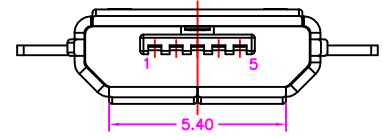


C

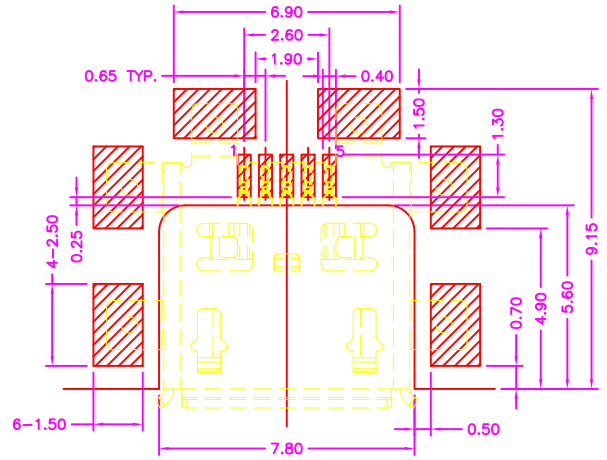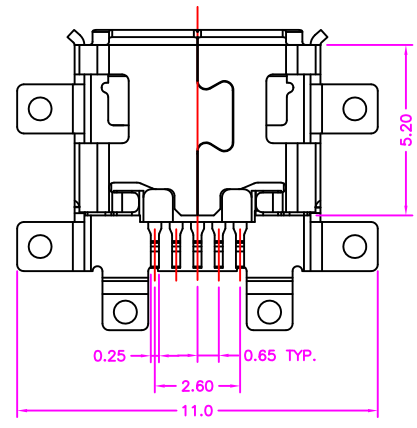

P.C.B LAYOUT  
TOP VIEW ±0.05

**PART NUMBER**

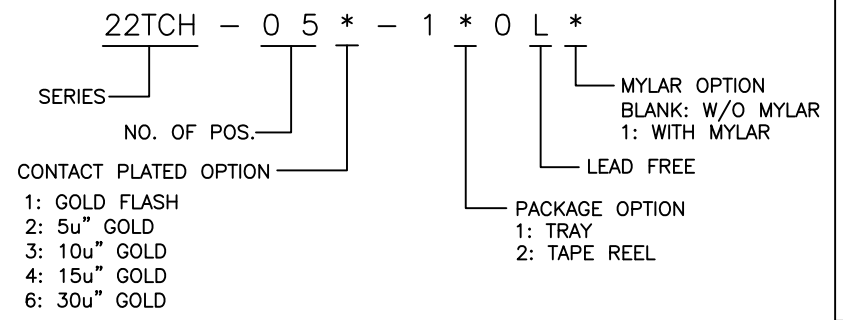

D

B	ADD. MYLAR	2009.7.7	
A	RELEASE	2009.5.20	
REV.	DESCRIPTION	DATE	2009.7.7

淮洋有限公司 HUAI YANG CO., LTD.		SERIES: USB CONNECTOR SERIES	
		TITLE: MICRO USB B TYPE, PCB MOUNT, SMT, BOARD CUT TYPE, METAL SHIELD, FEMALE	
LINEAR: .X±0.30 .XX±0.20 .XXX±0.10	APPROVALS	SIZE: A4	VERSION: B
ANGLES: ±3°	DRAWN: <i>Mans</i>	DWG NO. 22TC-001	
	CHECKED: <i>Lion</i>	SCALE: NONE	UNIT: mm
	APPROVED: <i>James</i>	SHEET: 1 OF 1	
10054			

1

2

3

4