

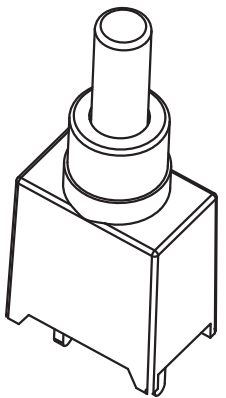



DIMENSION	TOLERANCE
BELOW 10 mm	± 0.3
10~100 mm	± 0.5
ABOVE 100 mm	± 0.8
ANGLE	± 3°

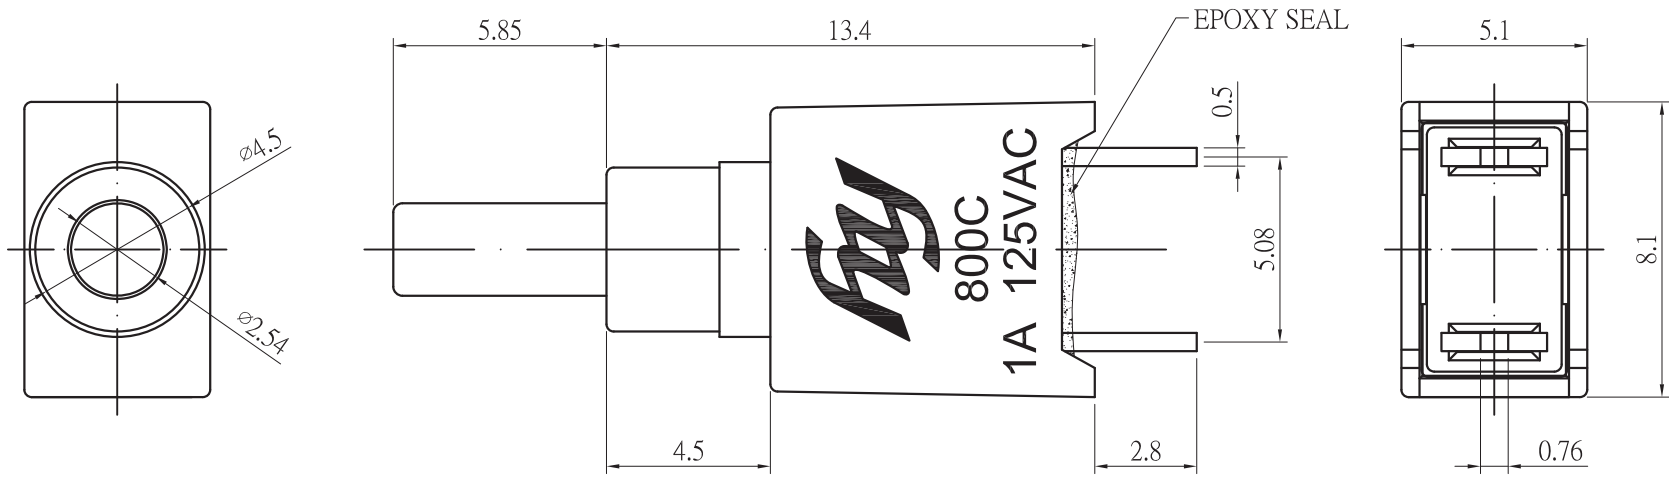

P.C. MOUNTING



SCHEMATIC



SPECIFICATIONS:

- 1.RATING: 1Amps with resistive load @ 125VAC or 28VDC
- 2.CONTACT RESISTANCE: 20m-ohms max. initial
- 3.INSULATION RESISTANCE:1,000M-ohms min.
- 4.DIELECTRIC STRENGTH: 1,500V RMS @ sea level
- 5.ELECTRICAL LIFE:30,000 make and break cycles at full load
- 6.OPERATING TEMPERATURE: -30°C to +85°C
- 7.OPERATING FORCE : 250±100 gf

△				DATE	2008/12/18	UNIT	mm	MODE	PUSH BUTTON SWITCH
△				APPROVAL	KAVEN	SCALE	1 : 1	PART	PS008-N11AA-HY
△				CONFIRM	ALAN	VIEW	⊕	2D FILE NAME	PS008-N11AA-HY
	DATE	APPROVAL	DESIGN	ENGINEERING CHANGE DESCRIPTION	DESIGN	ANDY	VER.	01	3D FILE NAME

