
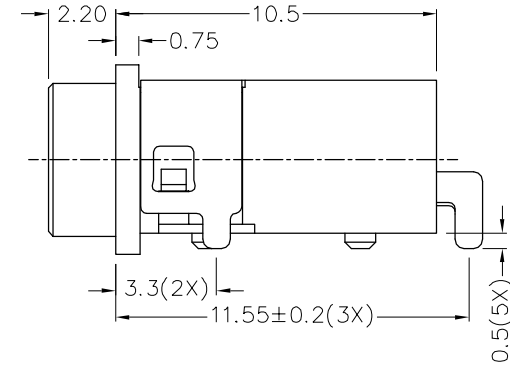
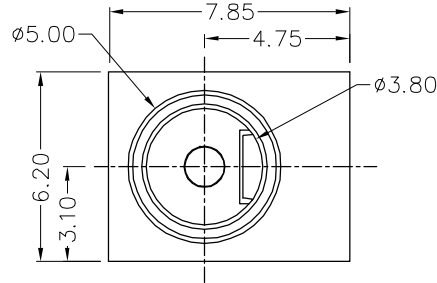


RoHS  
Compliant

ZONE	SYMBOL	REVISION	APPROVAL	DATE
		ADD DUSTPROOF LOGO	J.X.KUANG	6-11-2017


1

1

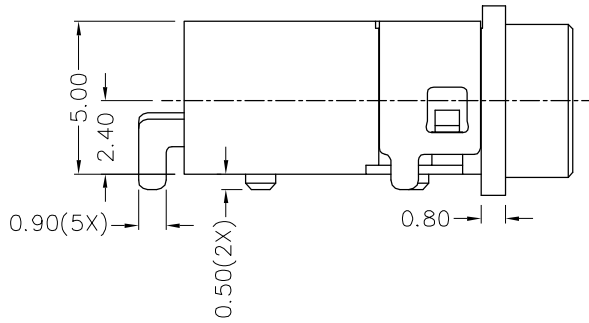

2


2

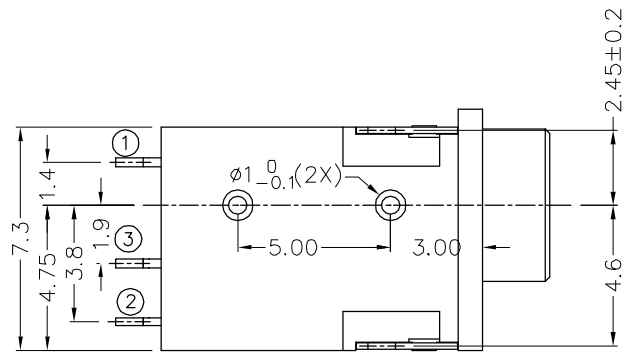

\* MATERIAL

- TERMINAL 1 : BRASS
- TERMINAL 2 : COPPER ALLOY
- TERMINAL 3 : BRASS
- SHIELD : BRASS
- HOUSING : HIGH TEMP. PLASTIC
- COVER : HIGH TEMP. PLASTIC


MODEL NO.	HWP-0101HS
SCHEMATIC	
CENTER PIN	∅1.3mm

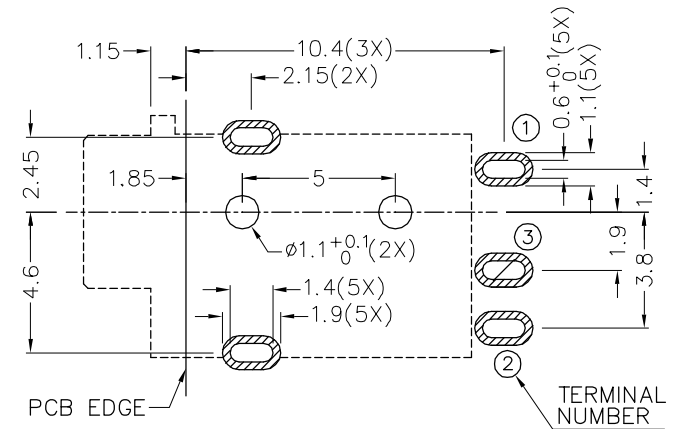

RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05  
(TOP VIEW)

3

3



DC MATE PLUG

4

4

				DESIGN	H.L.TAN	DATE	9-10-2015	SCALE	4:1
				DRAWING	J.H.ZHOU	DATE	6-11-2017	MATERIAL	*
PART NAME	HIGH CURRENT WATERPROOF/DUSTPROOF DC POWER SOCKET	TOLERANCE UNLESS	0.0±0.2	CHECK	T.Y.LI	DATE	6-11-2017	DWG. NO.	TZ\WP0101HS-A/2.0
PART NO.	HWP-0101HS	OTHERWISE SPECIFIED:	0.00±0.1 0.000±0.05	APPROVAL		DATE	6-11-2017	SHEET	

F

E

D


C

B

A

# HUAI YANG CO., LTD.

## Revision Control

Written	T.Y.LI	Date	18-3-2019	File Number	Y-HWP-0101HS-PA10T
Approved		Date	18-3-2019	Rev.	1.1

## Data Specification

**Item Number** : HWP-0101HS series  
**Description** : High Current Waterproof/Dustproof DC Power Socket

### A. General Scope

This specification covers the requirement for the direct circuit power supply for all audio systems and similar equipments.

### B. Mating Plug

The Mating plug shall be in 3.4mm diameter.

### C. Components and Materials

Plastic : PA10T  
Terminal 1 : Brass, Gold Flash  
Terminal 2 : Copper Alloy, Gold Flash  
Terminal 3 : Brass, Gold Flash  
Shield : Brass, Nickel Plated

### D. Electrical Requirements

#### Dielectric Strength

The socket shall withstand without failure, a potential of 500 volts r.m.s. 50/60Hz and 0.5mA applied between mutually insulated metal parts for one minute.

#### Insulation Resistance

Insulation resistance between insulated metal parts shall be 100 Megohm or more at initial and 50 Megohm or more after cold test, hot test, and humidity test when measured with a 500 volts D. C. insulation resistance meter.

#### Contact Resistance

Contact resistance shall be less than 50 Milliohms at initial and 100 Milliohms after life test between a terminal of the socket and that of the mating plug; less than 30 Milliohms at initial and 60 Milliohms after life test between terminal of the socket in a closed circuited, when measured at a current of less than 100 Milliampere 1 KHz. The Mating plug use shall be cleaned and free from oxidation film of the surface.

**Rating**

3.5A/16V DC Max.

**E. Mechanical Requirement**

**Insertion and Withdrawal Force**

The insertion and withdrawal force shall be 0.3 – 3Kgs at initial and 0.2 – 2Kgs after life test with the gauge plug.

**F. Soldering Test**

**Solderability Test**

a) Test Condition


- Solder Time : 2 Sec
- Solder Temperature : 255°C +/-5°C
- Flux : Neutral flux

b) Requirement : 95% coverage of solder on lead

**Resistance to Soldering Heat Test**

**Reflow Soldering (For Reference Only)**

The socket shall be placed in a reflow solder furnace with the temperature starting from the normal room temperature at around 25°C and up to 250°C +/-5°C over 360 second. The details are shown as the following flow chart.

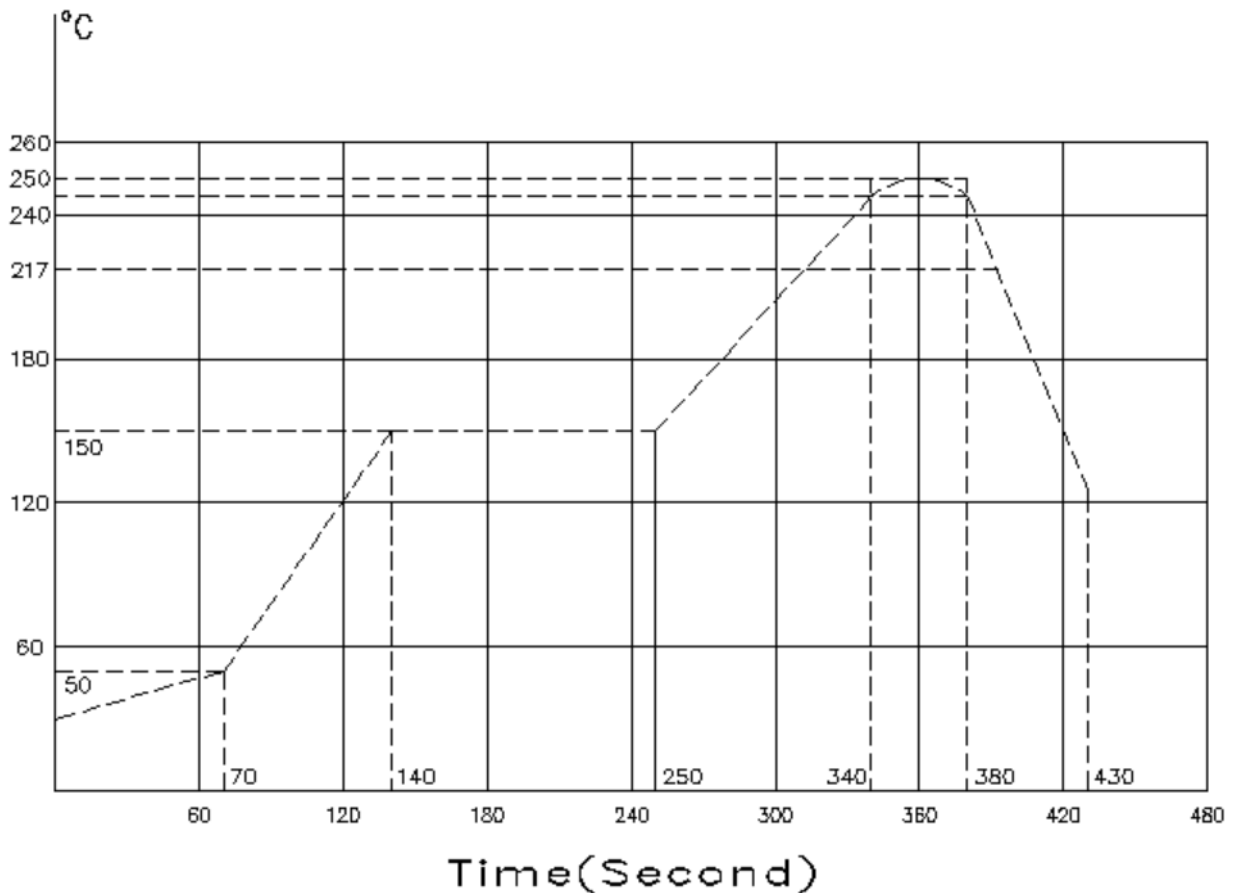

## **G. Endurance**

### **Life Test**

The Life Test shall be consisted of 5,000 cycles of insertion and withdrawal with the mating plug covered with a thin coat of grease in order to prevent from heating of wearing, at a rate of 24 cycles per minutes under no or rated load.

## **H. Environmental**

### **Heat Test**

The socket shall be placed in the testing chamber at a temperature of  $85^{\circ}\text{C} \pm 2^{\circ}\text{C}$  and the relative humidity of less than 50% RH for 96 hours and then placed in ambient temperature for more than 30 minutes recovery period. The relative test before and after test should be complied with Insulation Resistance shown on Paragraph (D.1~D.3).

### **Cold Test**

The socket shall be placed in the testing chamber at a temperature of  $-40^{\circ}\text{C} \pm 2^{\circ}\text{C}$  for 96 hours and then placed in ambient temperature for more than 30 minutes recovery period. The relative test before and after test should be complied with Insulation Resistance shown on Paragraph (D.1~D.3).

### **Humidity Test**

The socket shall be placed in the testing chamber at a temperature of  $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$  and the relative humidity of 90% to 95% RH for 96 hours the dew drops on the surface of socket shall be blown off and removed from the surface of the socket and then placed in ambient temperature for more than 30 minutes recovery period. The relative test before and after this test should be complied with Insulation Resistance shown on Paragraph (D.1~D.3).

## **I. Measuring Condition**

All measurements and test shall be made at a temperature  $10^{\circ}\text{C}$  to  $35^{\circ}\text{C}$  with a relative humidity of 45% RH to 85% RH under the standard atmospheric pressure unless the specified conditions.

## **J. Operating Temperature**

$-25^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

## **K. Warranty period/Storage condition/Application condition**

Warranty period	:	6 months after shipment
Storage condition	:	$0^{\circ}\text{C}$ to $40^{\circ}\text{C}$ , less than 80%RH without direct rays
Application condition	:	After removal of vacuum packaging, use within 72 hours at humidity level less than 60% RH and temperature less than $30^{\circ}\text{C}$

## **L. Waterproof/Dustproof**

The jack shall be stored for 30 minutes in 1m of water. And totally protected against dust (Refer to JIS standard IP67.).The socket need to match the O-Ring, O-Ring need to exert pressure to achieve a certain amount of interference.

F

E

D

C

B

A

RoHS  
Compliant

ZONE	SYMBOL	REVISION	APPROVAL	DATE
		VERSION FORMAT CHANGED FROM ALPHABET TO NUMERIC	J.X.KUANG	17-3-2017

1

1

2


2

3

3

4

4

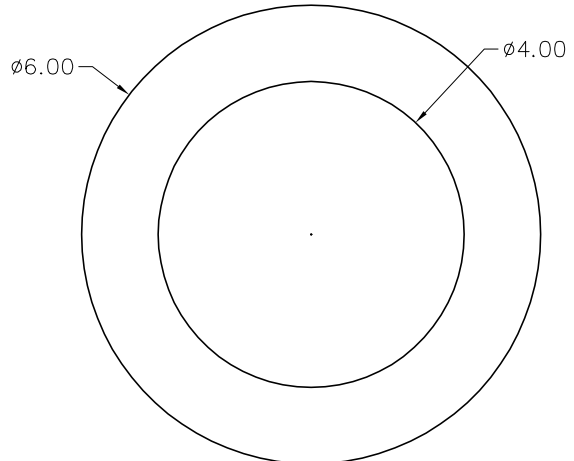

MATERIAL  
M1.MATERIAL: Silicone,94V-0  
M2.HARDNESS: 70°

淮 洋 有 限 公 司 HUI YANG CO., LTD. [www.hy1688.com.tw](http://www.hy1688.com.tw)

DESIGN	H.L.TAN	DATE	22-12-2015	SCALE	10:1
DRAWING	H.Q.ZHOU	DATE	17-3-2017	MATERIAL	
CHECK	T.Y.LI	DATE	17-3-2017	DWG. NO.	DZ\0-RING-2/1.0
APPROVAL	<i>[Signature]</i>	DATE	17-3-2017	SHEET	

PART NAME	O-RING	TOLERANCE UNLESS	0.0±0.2	UNIT:	mm
PART NO.	O-RING-2	OTHERWISE SPECIFIED:	0.00±0.1 0.000±0.05		

F

E

D

C

B

A