

Feature :

- FSTN LCD display resolution: 64*32 pixels
- View size: 0.9"
- SPST, momentary function


Application :

- Audio / video switchers
- Instrumentation
- Telecommunication
- Broadcast system
- Security system




SWITCH SPECIFICATIONS	
POLE - POSITION	OFF - <ON> for Momentary Type , SPST
CONTACT RATING	100mA 12V DC
CONTACT RESISTANCE	200 mΩ MAX
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	250 ± 100 gf
OPERATING LIFE	1,000,000 cycles
OPERATING TEMPERATURE RANGE	-10°C~70°C
TOTAL TRAVEL	3.3 ± 0.2 mm

● HOW TO ORDER

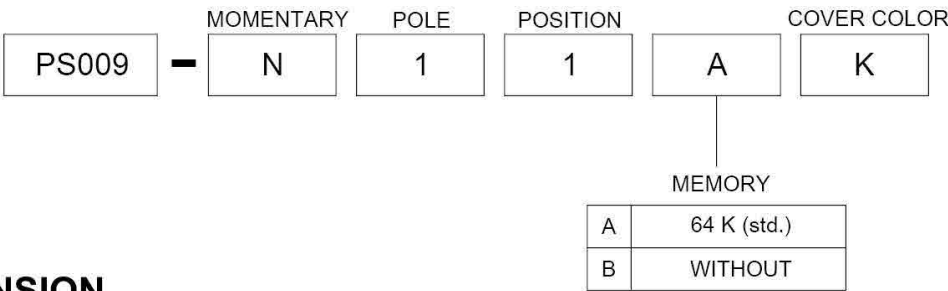

● DIMENSION

· PS009-N11AK

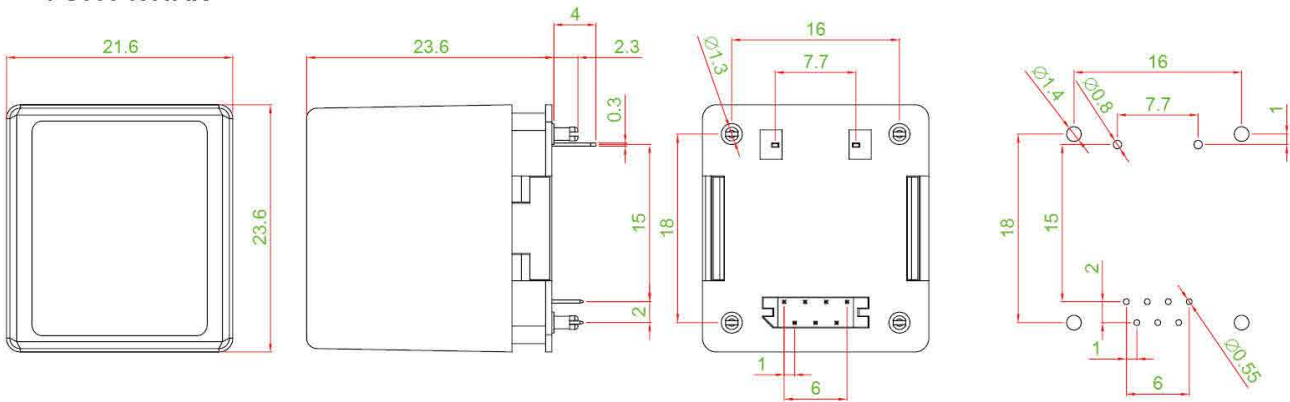

● CIRCUIT

SWITCH



LCD ELECTRICAL CHARACTERISTICS


DISPLAY

ITEM	CHARACTERISTICS	Unit
LCD type	FSTN / Transflective / Positive	
Pixels	64 * 32	Dot
View area	17.8 * 13.0	mm ²
Dots size	0.235 * 0.335	mm ²
Dots pitch	0.25 * 0.35	mm ²
Viewing angle	6 O'clock	
Operating temperature	-10 to 70	°C
Storage temperature	-20 to 80	°C
Duty ratio	1/32	Duty
Bias	1/6	Bias

BACKLIGHT

COLOR : Over 32K color of backlight					
Dominant Wavelength :					
Device	MIN.	TYP.	MAX.	Units	Test Conditions
Hyper RED	611	621	631	nm	IF=20mA
GREEN	510	525	540		
BLUE	457	470	483		

PIN STRUCTURE

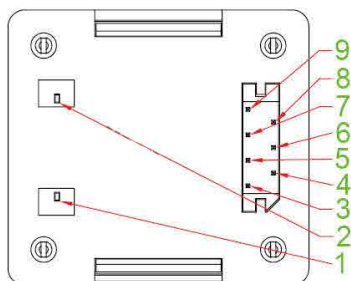

PIN NO.	SYMBOL	NAME	FUNCTION
1	SW1	Switch Pin	Normally open
2	SW2	Switch Pin	Normally open
3	VDD	Power	Power source for logic current and LCD
4	GND	Ground	Connect to ground.
5	SCK	Serial Clock	Clock line to synchronize data write for SPI
6	SDI	Data In	Data input line for SPI
7	SDO	Data Out	Data output line for SPI
8	SCS	Slave Control Select	Slave select for SPI. This line is active low.
9	ALARM	ALARM	For Button Mode to trigger change picture.